


## 6W-CEILING-LOUDSPEAKER DLS-180F in FULL-METAL-DESIGN

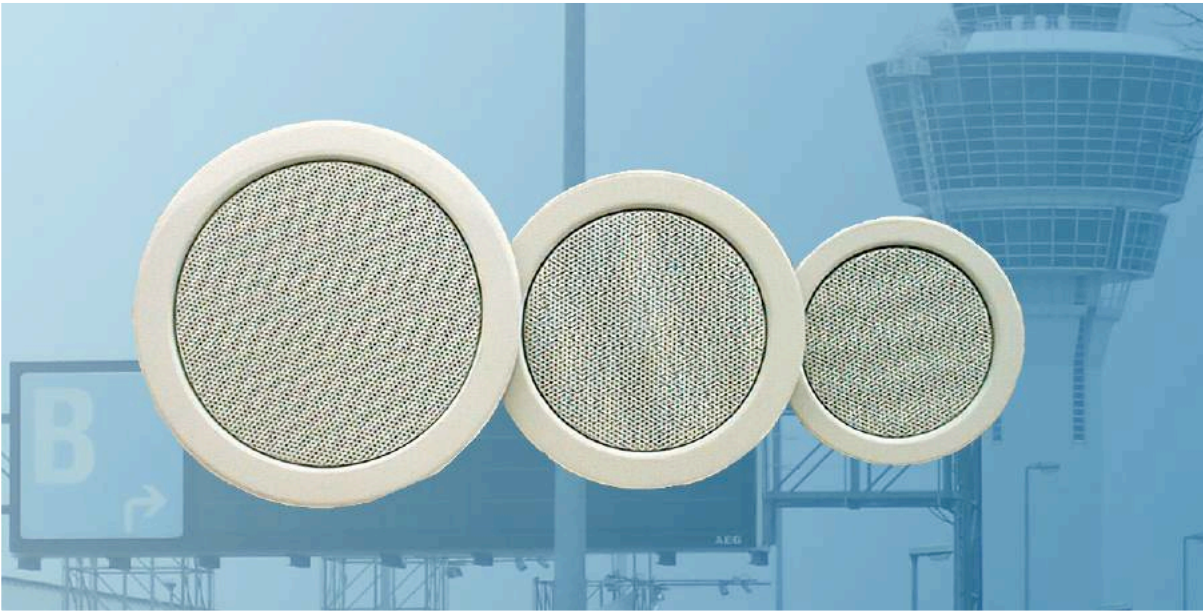

D  
L  
S

180F

6  
W

C  
E  
I  
L  
I  
N  
G

L  
O  
U  
D  
S  
P  
E  
A  
K  
E  
R

- FIRE-RESISTANT/PROTECTED CABINET
- EASY-MOUNTING THROUGH FAST-SPRING/BAYONET-SYSTEM
- **50-HZ-STABLE** 100-V-TRANSFORMER
- **TOUCH-PROTECTED** 100-V-QUICK-CONNECTING-CLAMP
- **BALL-ATTACK-LOCKING-DEVICE** & DUST-PROTECTION AVAILABLE
- POWER-SAVING THROUGH HIGH **SOUND-PREASURE-LEVEL**
- OPTIONAL **FIRE-DOME** & **IN-WALL/CONCRETE-DOME** AVAILABLE
- SPECIAL-COLOUR & **CHROME-PLATED** VERSIONS OBTAINABLE
- 2-WAY & 10-20-30-WATT & 8-OHMS-VERSIONS AVAILABLE
- **WEATHER-PROOFED/TROPICALIZED** & DAMP-ROOM-VERSIONS OPT.

### TECHNICAL DATA:

### DLS-180F

Loudspeaker:	6W/120mm-broadband
Power-Consumption:	100V-6-3-1.5W
Frequency-Range:	80-15 000 Hz
SPL 1W/1m:	94 dB
SPL 6W/1m:	102 dB
SPL 1W/1m <b>max:</b>	104 dB (3,5 kHz)
SPL 6W/1m <b>max:</b>	112 dB (3,5 kHz)
Radiation:	180 ° (1,8 kHz)
Dimensions:	180 mm x 80 mm
Depth Flat-Edition:	65 mm
Ceiling Cut-out:	165 mm
Weight:	1 Kg
Colour:	RAL 9010

