


## 6, 10, 20 and 30 Watt DLS-265F-II CEILING SPEAKER IN FULL-METAL-DESIGN

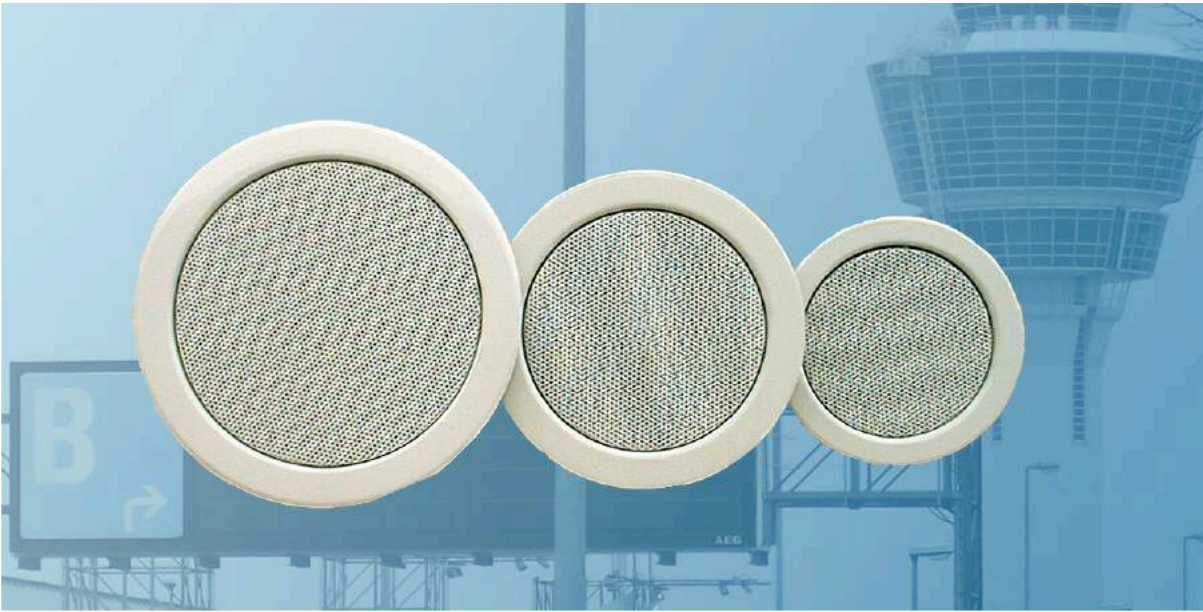

**D  
L  
S**

**265F  
-  
II**

**C  
E  
I  
L  
I  
N  
G**

**L  
O  
U  
D  
S  
P  
E  
A  
K  
E  
R**

- **HIGH-END II-WAY-VERSION in 6, 10, 20 and 30 Watt**
- FIRE-RESISTANT/PROTECTED CABINET
- EASY-MOUNTING THROUGH FAST-SPRING/BAYONET-SYSTEM
- **50-HZ-STABLE** 100-V-TRANSFORMER
- **TOUCH-PROTECTED** 100-V-QUICK-CONNECTING-CLAMP
- **BALL-PROOF-VERSION** ACCORDING TO DIN 18032/III AVAILABLE
- POWER-SAVING THROUGH **HIGH SOUND-PREASURE-LEVEL**
- OPTIONAL **FIRE-DOME** & **IN-WALL/CONCRETE-DOME** AVAILABLE
- **WET-ROOM/DAMP-ROOM-VERSIONS** & **CUSTOM-COLOUR** OBTAINABLE
- EXTREMELY SECURE SPECIAL-VERSION WITH **6 BAJONET-SPRINGS**

TECHNICAL DATA:	DLS-265F-II/6W	DLS-265F-II/10W
Loudspeaker:	30W-8"-II-WAY-SYSTEM	30W-8"-II-WAY-SYSTEM
Power-Consumption:	100V-6-3-1.5W	100V-10-5-2.5W
Frequency-Range:	50-20000Hz	50-20000Hz
SPL 1W/1m:	97 dB	97 dB
SPL xW/1m:	106 dB	107 dB
Radiation:	180° (1,6 kHz)	180° (1,6 kHz)
Diemnsions:	265 mm x 110 mm	265 mm x 115 mm
Ceiling Cut-Out:	240 mm	240mm
Weight:	1,9 kg	2,0 kg
Colour:	RAL 9010	RAL 9010

TECHNICAL DATA:	DLS-265F-II/20W	DLS-265F-II/30W
Loudspeaker:	30W-8"-II-WEGE-SYSTEM	30W-8"-II-WEGE-SYSTEM
Power-Consumption:	100V-20-10-5W	100V-30-20-10W
Frequency-Range:	50-20000Hz	50-20000Hz
SPL 1W/1m:	97 dB	97 dB
SPL xW/1m:	110 dB/20W	112 dB/30W
Radiation:	180° (1,6 kHz)	180° (1,6 kHz)
Diemnsions:	265 mm x 125 mm	265 mm x 125 mm
Ceiling Cut-Out:	240 mm	240 mm
Weight:	2,4 kg	2,4 kg
Colour:	RAL 9010	RAL 9010