


6/12W **BI-DIRECTIONAL-ALUMINIUM-SOUND-PROJECTOR** LAMPRODYN-130/BI

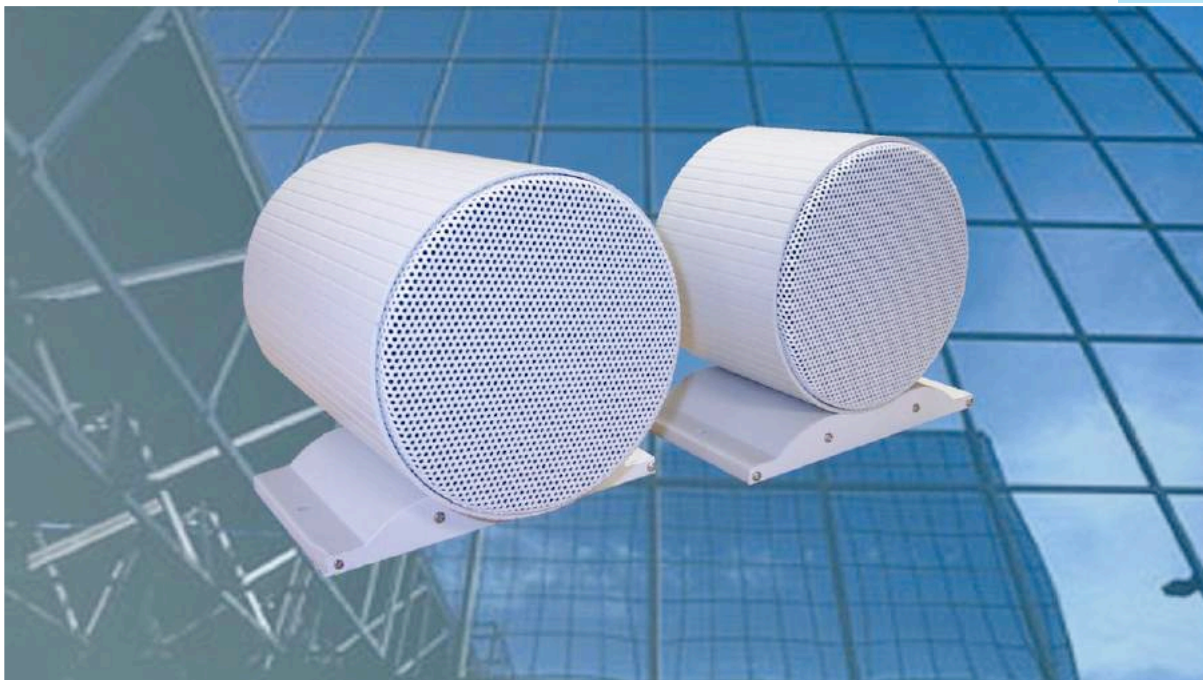

L  
A  
M  
P  
R  
O  
D  
Y  
N

130  
bi

6W

12W

B  
I  
  
D  
I  
R  
E  
C  
T  
I  
O  
N  
A  
L

- **FIRE-RESISTANT/PROTECTED**
- AGELESS FORM-STABLE-ALUMINIUM-CABINET
- **50-HZ-STABLE** 100-V-TRANSFORMER
- SPEECH & MUSIC-OPTIMIZED LOUDSPEAKER-QUALITY
- HUMIDITY-PROTECTED
- SIMILAR CUSTOM-SIZE & **CHROME-PLATED** VERSIONS AVAILABLE

**TECHNICAL DATA:**

**LAMPRODYN 130BI/6W**

**LAMPRODYN 130BI/12W**

Loudspeaker:	1 x 15W/120mm-Broadband	2 x 12W Broadband with HF-Conus
Power Consumption:	100V-6-3-1,5-W	100V-12-6-3W
Frequency-Range:	80-15 000 Hz	70-16 000 Hz
SPL 1W/1m:	95 dB	95 dB x 2
SPL 6W/1m:	103 dB	103 dB x 2
Radiation:	360°	360°
Dimensions:	146 x 100 mm	146 x 186 mm
Socket-Width:	175 mm	175 mm
Weight:	1,9 Kg	3,2 Kg
Colour:	white	white

