


6-WATT-CYLINDRIC-ALUMINIUM-SOUND-PROJECTOR LAMPRODYN-130/160

L
A
M
P
R
O
D
Y
N

130
-
160

6
W
S
O
U
N
D
P
R
O
J
E
C
T
O
R

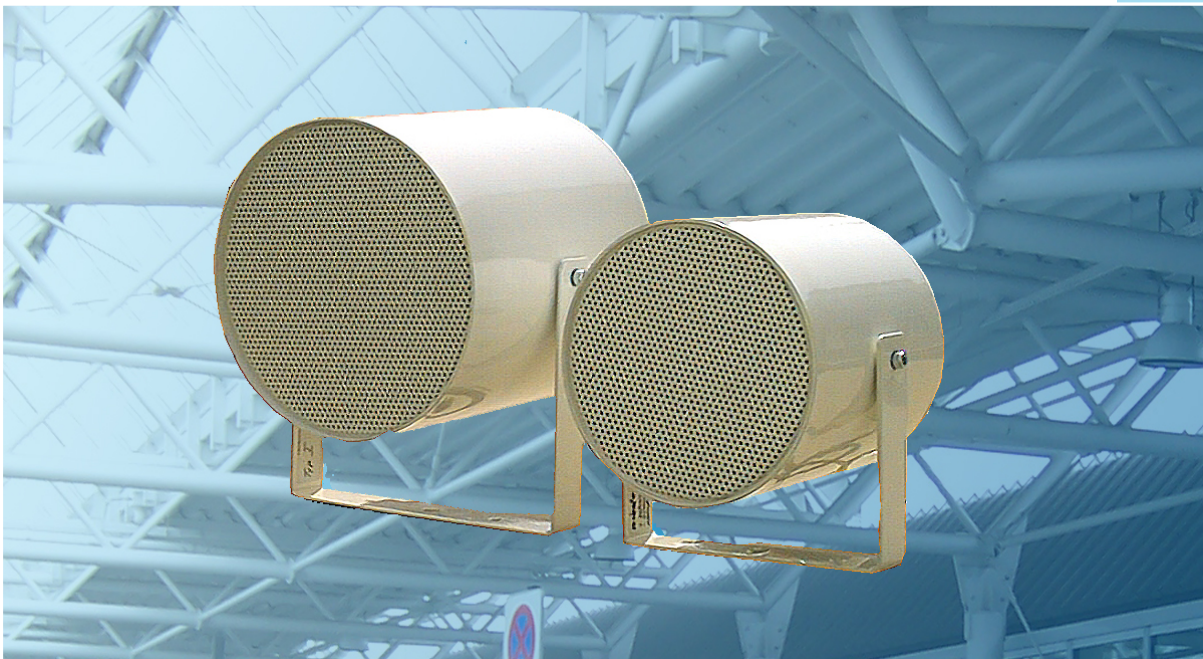

- FIRE-RESISTANT/PROTECTED CABINET
- AGELESS FORM-STABLE
- **50-HZ-STABLE** 100V-TURNFORMER
- OUTSTANDING LOUDSPEAKER-QUALITY (DLS-180/220F)
- POWER-SAVING THROUGH HIGH **SOUND-PREASURE-LEVEL**
- SPECIAL-COLOUR & **CHROME-PLATED** VERSIONS AVAILABLE
- CUSTOM-SIZE & **PENDULAR-VERSIONS** OBTAINABLE
- **WEATHER-PROOFED**-VESRIONS AVAILABLE
- 2-WAY & 10-20-30-WATT & 8-OHMS-VERSIONS OBTAINABLE

TECHNICAL DATA:

LAMPRODYN-130/6W

LAMPRODYN-160/6W

Loudspeaker:	6W/120mm-broadband	10/15W broadband with HF-dome
Power-Consumption:	100V-6-3-1.5W	100V-6-3-1.5W
FQ-Range:	80-15 000 Hz	70-18 000 Hz
SPL 1W/1m:	94 dB	95 dB
SPL 6W/1m:	102 dB	103 dB
SPL 1W/1m max:	104 dB (3,5 kHz)	106 dB (3,2 kHz)
SPL 1W/1m max:	112 dB (3,5 kHz)	114 dB (3,2 kHz)
Radiation:	180 ° (1,4 kHz)	180° (0,9 kHz) 160° (1kHz)
Dimensions (dia x depth):	140 x 165 mm	175 x 180 mm
Weight:	1,3 Kg	1,7 Kg
Colour:	RAL 9010	RAL 9010

