

# SLB-240-AB CEILING-SPEAKER WITH 2 DISCRETE SYSTEM-LINES A/B

S  
L  
B

240  
A/B

240  
MM

A / B




S  
Y  
S  
T  
E  
M

L  
I  
N  
E


S  
P  
E  
A  
K  
E  
R

- ONLY 240-MM-EXTERNAL-DIAMETER ON TWO OVAL 165-MM-SYSTEMS
- ONLY 60-MM-MOUNTING-DEPTH
- **TWO AUTONOMOUS** LOUDSPEAKER & 100-VOLT-TRANSFORMER PER SYSTEM
- ENABLE OPERATION OF SPEAKER VIA **TWO DISCRETE CABLE-LINES**
- IN CASE OF FAILURE OF ONE LINE, CONTINUOUS FUNCTION OF THE SECOND-LINE
- **50-HZ-STABLE** 100-V-TRANSFORMER
- IDENTICAL **HIGH LOUDSPEAKER QUALITY** AS **WLA-230-AB**
- **EASE & ULYSSES**-DATA BY AUDIO & ACOUSTICS CONSULTING
- **103 db / 106,5 db MAX-SPL** (WIHTOUT FD / WITH STANDARD-FD)
- OPTIONAL CERAMIC-CLAMP & THERMO-FUSE AVAILABLE
- OPTIONAL **TWO DIFFERENT FIREDDOME-VERSIONS** 68-MM & 108-MM
- **BALL-PROOF-DEVICE** ACCORDING TO **DIN 18032-3** OPTIONAL

| TECHNICAL DATA:    | SLB-240-AB                    | SLB-240FT-AB (WITH FD)                |
|--------------------|-------------------------------|---------------------------------------|
| Loudspeaker:       | 2 x 15W 165 x 70-mm-Fullrange | 2 x 15W 165 x 70-mm-Fullrange         |
| Power-Consumption: | 2 x 100V-6-3-1.5W             | 2 x 100V-6-3-1.5W                     |
| Frequency-Range:   | 80-20 000 Hz                  | 120-20 000 Hz                         |
| SPL 1W/1m:         | 93 dB                         | 95 dB (with Standard-Firedome)        |
| SPL max. 1W/1m:    | 96 dB MAX                     | 99, 5 dB MAX                          |
| SPL 6W/1m:         | 101 dB                        | 102,5 dB                              |
| SPL max. 6W/1m:    | 103 dB MAX                    | 106,5 dB MAX                          |
| Dimensions:        | 240 x 60 mm (springs below)   | 240 x 68 or 240 x 108 mm with FD      |
| Ceiling-Cutout:    | 220 mm                        | 220 mm                                |
| Weight:            | 1,45 Kg                       | 1,7 Kg with Flat-FD / 1,9 Kg Standard |
| Material:          | Metal                         | Metal                                 |
| Colour:            | RAL 9010                      | RAL 9010                              |
| optional:          |                               | Firedome FLAT & STANDARD              |

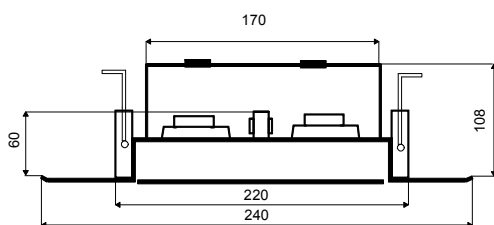

SLB-240-AB WITH 108-MM-FIREDOME

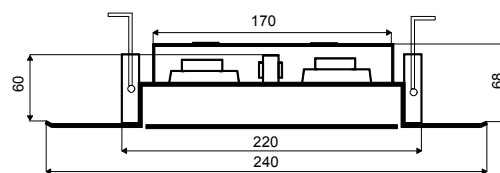

SLB-240-AB WITH 68-MM-FIREDOME