

SLB-240-AB-10W CEILING-SPEAKER WITH 2 DISCRETE SYSTEM-LINES A/B

S
L
B

240
A/B

2x
10W

240
MM

A / B



- ONLY **240-MM-EXTERNAL-DIAMETER** INCLUDING TWO OVAL 165-MM-SYSTEMS
- ONLY **60-MM-MOUNTING-DEPTH**
- **TWO AUTONOMOUS** LOUDSPEAKER & 100-VOLT-TRANSFORMER PER SYSTEM
- ENABLE OPERATION OF SPEAKER VIA **TWO DISCRETE CABLE-LINES**
- IN CASE OF FAILURE OF ONE LINE, CONTINOUS FUNCTION OF THE SECOND-LINE
- **50-HZ-STABLE** 100-V-TRANSFORMER
- IDENTICAL **HIGH LOUDSPEAKER QUALITY** AS **WLA-230-AB**
- **EASE & ULYSSES-DATA** BY AUDIO & ACOUSTICS CONSULTING
- **103 dB / 106,5 dB MAX-SPL** (WIHTOUT FD / WITH STANDARD-FD)
- OPTIONAL CERAMIC-CLAMP & THERMO-FUSE AVAILABLE
- OPTIONAL **TWO DIFFERENT FIREDDOME-VERSIONS** 68-MM & 108-MM
- **BALL-PROOF-DEVICE** ACCORDING TO **DIN 18032-3** OPTIONAL

S
Y
S
T
E
M


L
I
N
E

S
P
E
A
K
E
R


TECHNICAL DATA:

SLB-240-AB/10W

Loudspeaker:	2 x 15W 165 x 70-mm-Fullrange
Power-Consumption:	2 x 100V-10-6-3-1.5W
Frequency-Range:	120-20 000 Hz
SPL 1W/1m:	93 dB
SPL max 1W/1m:	96 dB MAX
SPL 10W/1m:	103 dB
SPL max 10W/1m:	106 dB MAX
Dimensions:	240 x 60-mm (springs down)
Dimensions incl. FD:	108-mm-Standard / 68-mm-FLAT
Ceiling-Cutout:	220 mm
Weight:	1,45 Kg
Material:	Metal
Colour:	RAL 9010

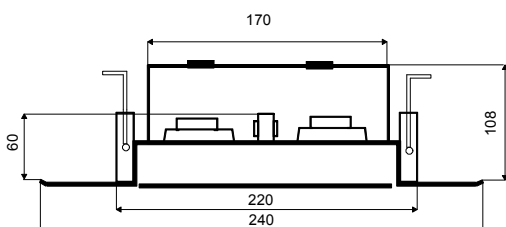

SLB-240-AB WITH 108-MM-FIREDDOME

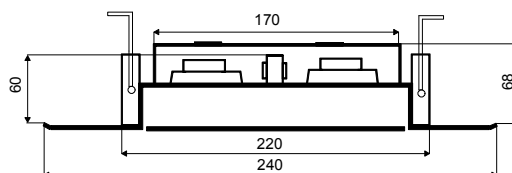

SLB-240-AB WITH 68-MM-FIREDDOME