

DLS-265-DC-10W / 30W 2 x DC-VOICE-COIL FOR A/B-SYSTEM-LINES

D
L
S

265
DC

2x

DC

VOICE
COIL

10W

30W



- 2 x 10W / 30W-FULL-RANGE-SPEAKER FOR HIGH-QUALITY A/B-CEILING-ACOUSTIC
- 2 AUTONOMOUS **VOICE-COILS** OVER A **200-MM-MEMBRANE**
- IN **CASE OF BREAKDOWN** OF ONE LINE, **CONTINOUS FUNCTION** OF THE SECOND
- TWO AUTONOMOUS **100-V-TRANSFORMER** PER SYSTEM
- **NO PHASE-SHIFT** ON THE MEMBRANE-SURFACE
- **NO BISECTION** OF THE **MEMBRANE-SURFACE**
- 2 x 100V-30-20-10-6-3W / 2 x 10-5-2,5W IN A/B-OPERATION
- OPTIONAL 60-40-20-12-6W / 20-10-5W IN SINGLE-OPERATION
- OPTIONAL **CERAMIC-CLAMP & THERMO-FUSE** AVAILABLE
- **BALL-PROOF-DEVICE** ACCORDING TO **DIN-18032-III** OPTIONAL
- **OPTIONAL 2 FIREDOMES** AVAILABLE: **FLAT: 110-MM / STANDARD: 145-MM**
- **WET-ROOM/DAMP-ROOM-VERSION & CUSTOM-COLOUR** OBTAINABLE

A / B



S
Y
S
T
E
M

TECHNICAL DATA:

DLS-265-DC-10W

DLS-265-DC-30W

Loudspeaker:	2 x 30W-8"-FULLRANGE-SYSTEM	2 x 30W-8"-FULLRANGE-SYSTEM
100-V-Taps:	2 x 100V-10-5-2,5W	2 x 100V-30-20-10-6-3W
Frequency-Range:	80-18 000 Hz	80-18 000 Hz
SPL 1W/1M:	93 dB	93 dB
SPL MaxW/1M:	103 dB	107 dB
Dimensions:	265 x 114-mm / 94-mm-Flat	265 x 114-mm / 94-mm-Flat
Dimensions with FD-Standard:	265 x 145-mm-STANDARD	265 x 145-mm-STANDARD
Dimensions with FD-FLAT:	265 x 110-mm-FLAT	265 x 110-mm-FLAT
Ceiling-Cutout:	240 mm	240 mm
Weight:	2,15 Kg / ca. 2,7 Kg with FD	ca. 2,15 Kg / ca. 2,7 Kg with FD
Weight FLAT-Version:	2,30 Kg / ca. 2,8 Kg	2,30 Kg / ca. 2,8Kg
Material:	Fullmetal	Fullmetal
Colour:	RAL 9010	RAL 9010

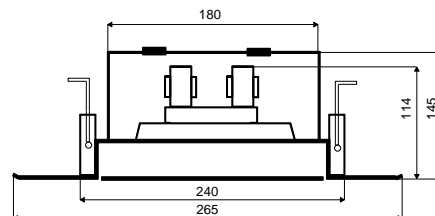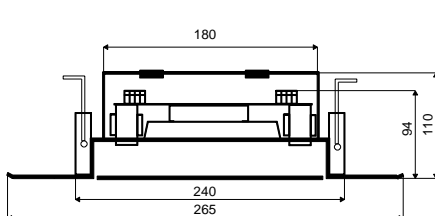

L
I
N
E
S