

6-WATT & 10-WATT **WLA-230-DC** DUAL-CONE FOR A/B-SYSTEM-LINES


**W
L
A

2
3
0

DC

D
U
A
L

C
O
N
E**

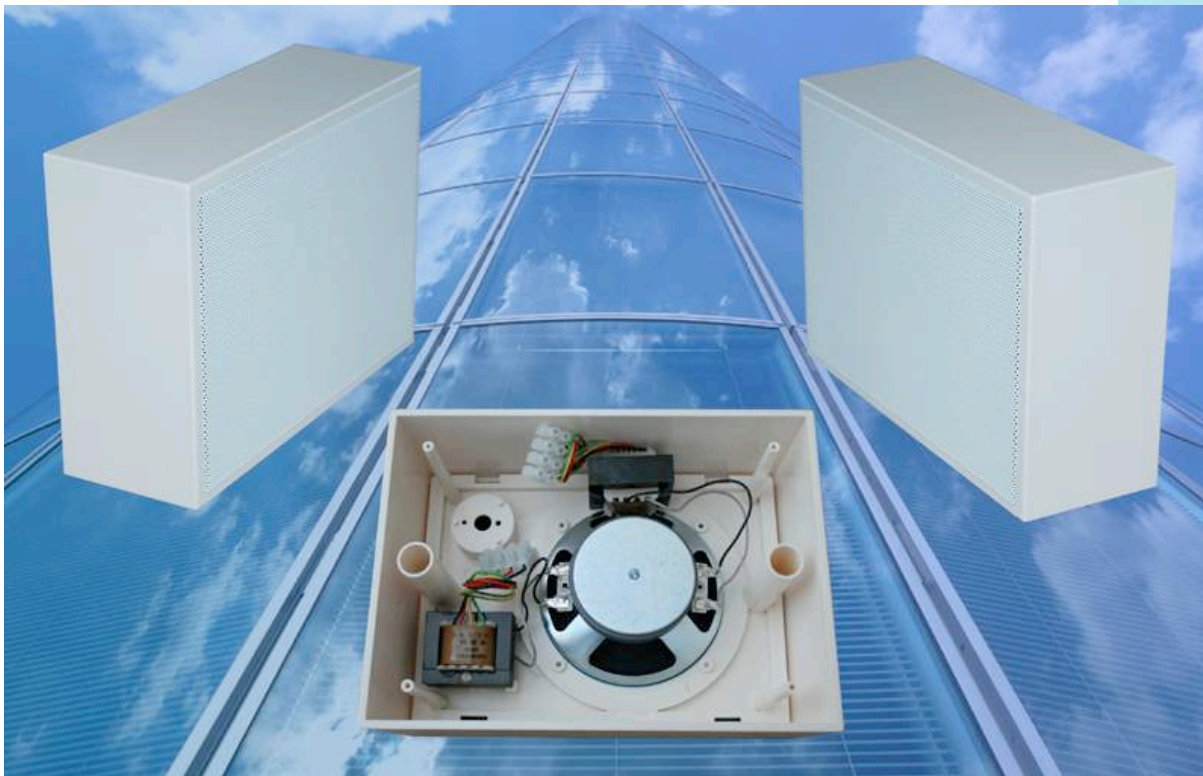

- **NO LOSS OF 50% OF THE MEMBRANE-SURFACE** IN FAILURE-CASE
- IN CASE OF BREAKDOWN OF ONE LINE, CONTINUOUS FUNCTION OF THE SECOND
- **TWO AUTONOMOUS VOICE-COILS PER SYSTEM**
- LOUDSPEAKER-PROTECTION THROUGH **SPECIAL VOICE-COIL-WINDINGS**
- **50-WATT-PEAK-POWER-RATING** PER VOICE-COIL
- IN CASE OF HEAT-OVERLOAD OF ONE VOICE-COIL, CONTINUOUS FUNCTION OF THE SECOND VOICE-COIL
- **TWO AUTONOMOUS 100-VOLT-TRANSFORMER** PER SYSTEM
- **NO PHASE-SHIFT** ON THE MEMBRANE-SURFACE
- OPTIONAL CERAMIC-CONNECTING-CLAMP & THERMO-FUSE AVAILABLE
- OPTIONAL **CLB-180-DC/DLS-180-DC/RG-180-DC** AND OTHER DC-VERSIONS

A / B

**S
Y
S
T
E
M

L
I
N
E
S**

TECHNICAL DATA:	WLA-230-DC	WLA-230-DC/10
Loudspeaker:	5" / 2 x 15W with HF-Cone	5" / 2 x 15W with HF-Cone
100-V-Taps:	2 x 100V-6-3-1.5W	2 x 100V-10-5-2,5W
FQ-Range:	80-16 000 Hz	80-16 000 Hz
SPL 1W/1m:	95 dB	95 dB
SPL 6W/1m:	103 dB	105 dB
Dimensions:	230 x 170 x 80 mm	230 x 170 x 80 mm
Weight:	1,4 Kg	1,5 Kg
Material:	ABS	ABS
Colour:	white / opt. Custom-Colour	white

