

WHL-250-AB ON-WALL-SPEAKER WITH 2 DISCRETE SYSTEM-LINES A/B



W
H
L

250



A/B

- **TWO AUTONOMOUS** LOUDSPEAKER PER SYSTEM
- **TWO AUTONOMOUS** 100-VOLT-TRANSFORMER
- ENABLE OPERATION OF SPEAKER VIA TWO DISCRETE CABLE-LINES
- IN CASE OF FAILURE OF ONE LINE, CONTINOUS FUNCTION OF THE SECOND-LINE
- VERY **FAST MOUNTING** THROUGH QUICK-SNAP-**REAR PANEL**
- ONLY **TWO DRILLING-POINTS** FOR THE WHOLE LOUDSPEAKER
- **50-HZ-STABLE** TRANSFORMER
- **TOUCH-PROTECTED** 100-V-WAGO-QUICK-CONNECTING-CLAMPS
- OPTIONAL CERAMIC-CONNECTING-CLAMP & THERMO-FUSE AVAILABLE

A / B

TECHNICAL DATA:	WHL-250-AB	WHL-250-AB/10
Loudspeaker:	2 x 15W 165 x 70-mm-Fullrange	2 x 15W 165 x 70-mm-Fullrange
Power-Consumption:	100V-6-3-1.5W	100V-10-5-2.5W
Frequency-Range:	70-20000 Hz	70-20000 Hz
SPL 1W/1m:	92 dB	92 dB
SPL 6W/1m:	100 dB	102 dB
Dimensions:	255 x 195 x 85 mm	255 x 195 x 85 mm
Weight:	2,2 Kg	app. 2,5 Kg
Material:	MDF / Metal-Grill	MDF / Metal-Grill
Colour:	white	white

S
Y
S
T
E
M

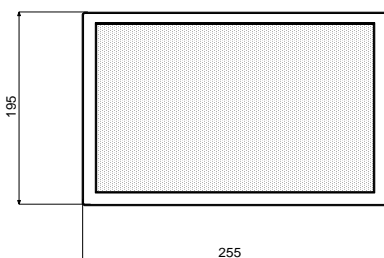

L
I
N
E
S