

6/10 Watt-**IN-WALL/HOLLOW-SPACE** WUL-270-DC FOR AB-LINES

W
U
L

270
DC

I
N

W
A
L
L

L
O
U
D
S
P
E
A
K
E
R

DUAL
CONE




- SUITABLE FOR **HOLLOW-SPACE & IN-WALL-MOUNTING**
- **NO LOSS OF 50% OF THE MEMBRANE-SURFACE** IN FAILURE-CASE
- IN CASE OF BREAKDOWN OF ONE LINE, CONTINUOUS FUNCTION OF THE SECOND
- **TWO AUTONOMOUS** VOICE-COILS PER SYSTEM
- LOUDSPEAKER-PROTECTION THROUGH **SPECIAL VOICE-COIL-WINDINGS**
- **50-WATT-PEAK-POWER-RATING** PER VOICE-COIL
- IN CASE OF HEAT-OVERLOAD OF ONE VOICE-COIL, CONTINUOUS FUNCTION OF THE SECOND VOICE-COIL
- **TWO AUTONOMOUS** 100-VOLT-TRANSFORMER PER SYSTEM
- **NO PHASE-SHIFT** ON THE MEMBRANE-SURFACE
- **50-HZ-STABLE** 100-V-TRANSFORMERS
- OPTIONAL CERAMIC-CONNECTING-CLAMP & THERMO-FUSE AVAILABLE

TECHNICAL DATA:

WUL-270-DC/6W

WUL-270-DC/10WATT

Loudspeaker:	5" / 2 x 15W with HF-Cone	5" / 2 x 15W with HF-Cone
100-V-Taps:	2 x 100V-6-3-1.5W	2 x 100V-10-5-2,5W
FQ-Range:	80-16 000 Hz	80-16 000 Hz
SPL 1W/1m:	95 dB	95 dB
SPL 6W/1m:	103 dB	105 dB
Dimensions:	270 x 181 x 79 mm	270 x 181 x 79 mm
Weight:	1,6 Kg	1,8 Kg
Material:	ABS	ABS
Colour:	white	white

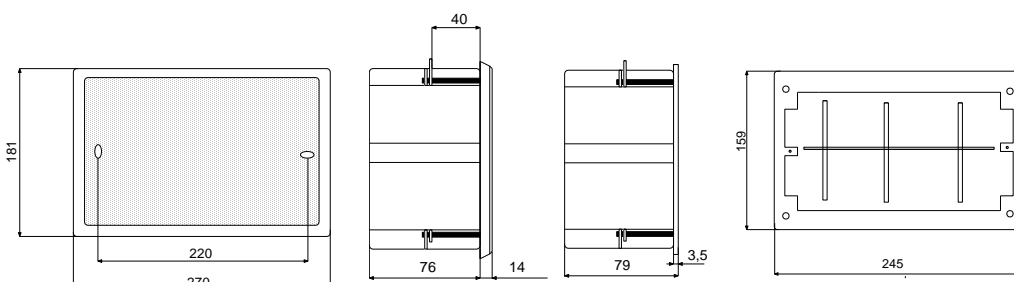

wall-cut-out for hollow-space-mounting 234 x 149 mm