


ALU-SOUND-PROJECTOR LAMPRODYN-130/160-DC FOR A/B-SYSTEMS

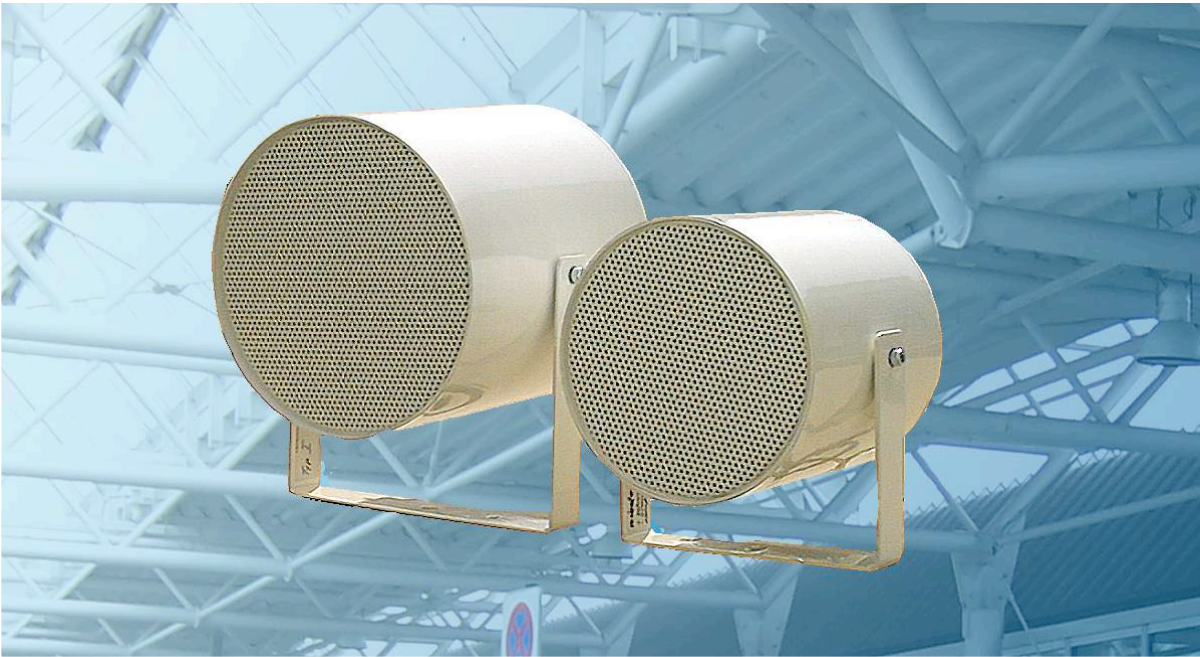

L
A
M
P
R
O
D
Y
N

130

160

DC

F
O
R

A/B

S
Y
S
T
E
M

L
I
N
E
S

- **NO LOSS OF 50% OF THE MEMBRANE-SURFACE IN FAILURE-CASE**
- IN CASE OF BREAKDOWN OF ONE LINE, CONTINUOUS FUNCTION OF THE SECOND
- **TWO AUTONOMOUS VOICE-COILS PER SYSTEM**
- **TWO AUTONOMOUS 100-VOLT-TRANSFORMER PER SYSTEM**
- IN CASE OF HEAT-OVERLOAD OF ONE VOICE-COIL, CONTINUOUS FUNCTION OF THE SECOND VOICE-COIL
- **NO PHASE-SHIFT ON THE MEMBRANE-SURFACE**
- **50-HZ-STABLE 100-V-TRANSFORMER**
- SPECIAL-COLOUR & **CHROME-PLATED** VERSIONS AVAILABLE
- CUSTOM-SIZE & **PENDULAR-VERSIONS** OBTAINABLE
- **WEATHER-PROOFED-VERSIONS** AVAILABLE

TECHNICAL DATA:

LAMPRODYN-130-DC

LAMPRODYN-160-DC

Loudspeaker:	5" / 2 x 15W with HF-Cone	6,5" / 2 x 15W with HF-Cone
100-V-Taps:	2 x 100V-6-3-1.5W	2 x 100V-6-3-1,5W
FQ-Range:	80-15 000 Hz	70-18 000 Hz
SPL 1W/1m:	94 dB	95 dB
SPL 6W/1m:	102 dB	103 dB
Radiation:	180° (1,4 kHz)	180° (0,9 kHz) 160° (1kHz)
Dimensions:	140 x 150 mm	175 x 180 mm
Weight:	1,5 Kg	1,9 Kg
Colour:	RAL 9010	RAL 9010

