


DLS-265F/30W-ESONIC-808-8"-KOAXIAL-HIGH-SPL-LOUDSPEAKER

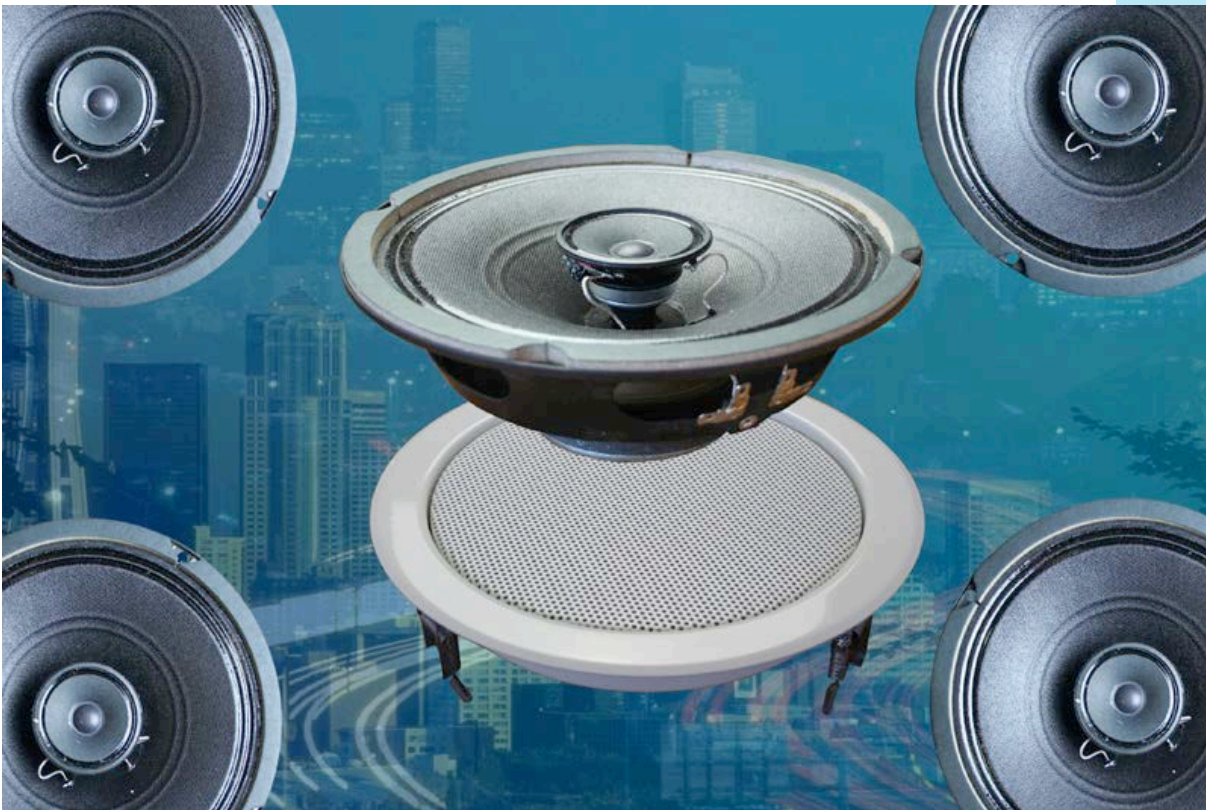

**D
L
S

2
6
5

F / FT**

**K
O
A
X**

**E
S
O
N
I
C**

**8
0
8**

30

**W
A
T
T**

- **EASE & ULYSSES**-DATA FROM AUDIO-ACOUSTICS AACHEN
- 3 DIFFERENT 100-V-VERSIONS AVAILABLE:
- 100V-10-5-2,5W / 100V-20-10-5W / 100V-30-15-7,5W
- EXTRAORDINARY **HIGH AUDIO QUALITY**
- OPTIONAL WITH **FIREDOMES** AVAILABLE
- **SPLASH-WATER-RESISTENT** MEMBRANE-COATING
- CEILING SPEAKER FOR **CRITICAL ACOUSTICAL** ENVIRONMENT
- **BALL-PROOF-DEVICE** ACCORDING TO **DIN-18032-III** OPTIONAL OBTAINABLE
- **WET-ROOM/DAMP-ROOM**-VERSIONS & **CUSTOM-COLOUR** OBTAINABLE
- EXTREMELY SECURE SPECIAL-VERSION WITH **6 BAJONET-SPRINGS** AVAILABLE
- OPTIONAL **CERAMIC-CLAMP** & **THERMO-FUSE** AVAILABLE

TECHNICAL DATA:

DLS-265F/30W-E-SONIC-808-KOAX

Loudspeaker:	8" Koaxial-Loudspeaker
Nominal Power:	30/60 Watt
Power-Consumption:	100V-30-15-7,5W / 100V-20-10-5W / 100V-10-5-2,5W
Frequency-Range (-10dB):	66 – 18 800 Hz
SPL 1W/1m:	100 dB
SPL 30W/1m:	115 dB
SPL 1W/1M max. EASE/Ulysses:	104 dB (1,3 kHz)
SPL 30W/1M max. EASE/Ulysses:	118 dB (1,3 kHz)
Radiation H (0,5/1/2/4KHz):	180°/180°/83°/38°
Radiation V (0,5/1/2/4KHz):	180°/180°/83°/38°
Ceiling Cut-out:	240 mm
Dimensions:	265 x 115 mm (10W) / 265 x 124 mm 20 & 30W with FT: 265 x 145 mm
Weight:	30W: 2,6kg, 20W: 2,5kg, 10W: 2,3kg with FireDome: add. 0,65kg, with 6-springs: add. 0,15kg
Colour:	RAL 9010, opt. RAL-Classic

