

# 10-watt-ceiling-loudspeaker DLS-180/220/265F in full-metal-design

D  
L  
S

180F


220F

265F

1  
0

W  
A  
T  
T

L  
O  
U  
D  
S  
P  
E  
A  
K  
E  
R

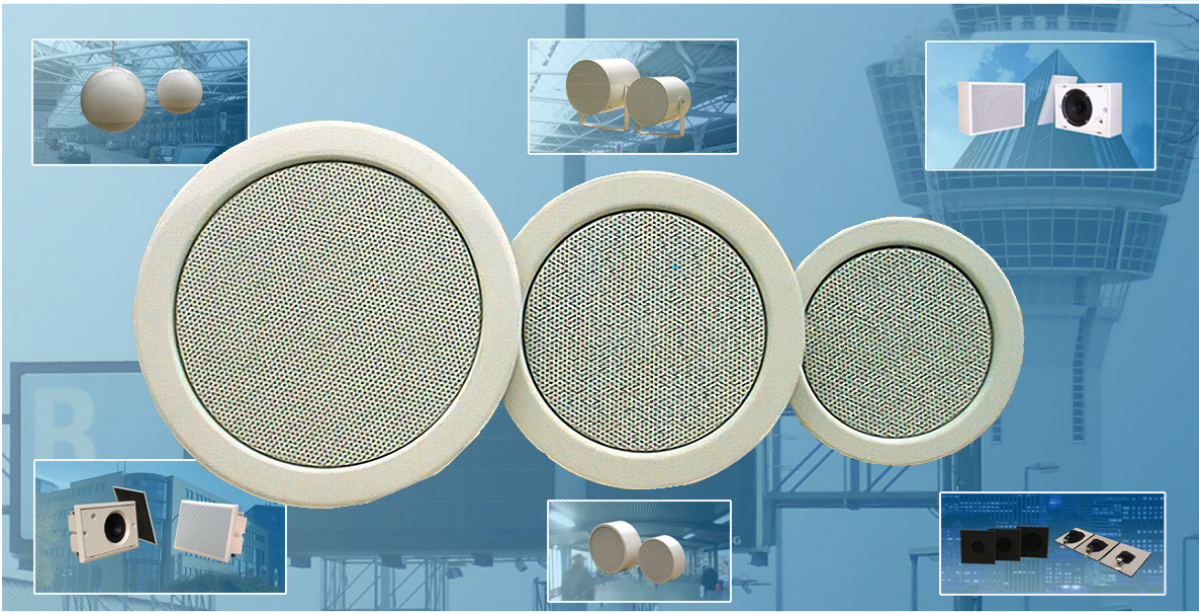

- TECHNICAL DATA STANDS REPRESENTATIVE FOR MOST 10W-SYSTEMS
- EASY-MOUNTING THROUGH FAST-SPRING/BAYONET-SYSTEM
- 50-HZ-STABLE 100-V-TRANSFORMER
- TOUCH-PROTECTED 100-V-QUICK-CONNECTING-CLAMP
- OUTSTANDING LOUDSPEAKER-QUALITY (DLS-180F/220F/265F)
- POWER-SAVING THROUGH HIGH SOUND-PREASURE-LEVEL
- OPTIONAL FIRE-DOME & IN-WALL/CONCRETE-DOME AVAILABLE
- SPECIAL-COLOUR & CHROME-PLATED VERSIONS OBTAINABLE
- 2-WAY & 10-20-30-WATT & 8-OHMS-VERSIONS AVAILABLE
- WEATHER-PROOFED/TROPICALIZED & DAMP-ROOM-VERSIONS OPT.

## TECHNICAL DATA:

### DLS-180F/10

### DLS-220F/10

### DLS-265F/10

Loudspeaker:	10W/130mm-broadband	10/15W broadband with HF-dome	10/15W-broadband with HF-dome
Power-Consumption:	100V-10-5-2,5W	100V-10-5-2,5W	100V-10-5-2,5W
FQ-Range:	70-17 000 Hz	70-18 000 Hz	70-19000Hz
SPL 1W/1m:	93 dB	95 dB	98 dB
SPL 10W/1m:	103 dB	105 dB	108 dB
SPL 1W/1m max:	95 dB (3,5 kHz)	106 dB (3,2 kHz)	105 dB (3,8 kHz)
SPL 10W/1m max:	105 dB (3,5 kHz)	116 dB (3,2 kHz)	115dB (3,8 kHz)
Radiation:	180 ° (1,2 kHz)	180° (1,5 kHz)	180° (1,4 kHz)
Dimensions:	180 mm x 98 mm	220 mm x 100 mm	265 mm x 105 mm
Depth Flat-Edition:	65 mm	65 mm	65 mm
Ceiling-Cut-out:	165 mm	200 mm	240 mm
Weight:	1,4 Kg	1,5 Kg	1,6 Kg
Colour:	RAL 9010	RAL 9010	RAL 9010

