

6W-CEILING-LOUDSPEAKER DLS-180F/ 220F/ 265F in FULL-METAL-DESIGN

D
L
S

180F


220F

265F

6
W

C
E
I
L
I
N
G

L
O
U
D
S
P
E
A
K
E
R

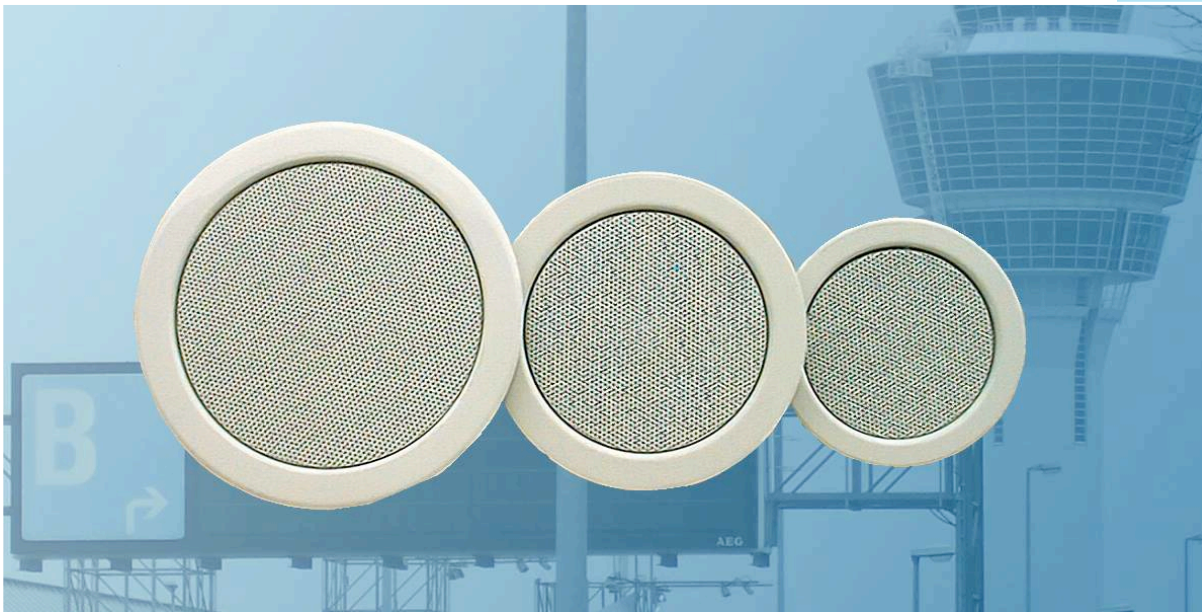

- FIRE-RESISTANT/PROTECTED CABINET
- EASY-MOUNTING THROUGH FAST-SPRING/BAYONET-SYSTEM
- **50-HZ-STABLE** 100-V-TRANSFORMER
- **TOUCH-PROTECTED** 100-V-QUICK-CONNECTING-CLAMP
- **BALL-ATTACK-LOCKING-DEVICE** & DUST-PROTECTION AVAILABLE
- POWER-SAVING THROUGH HIGH **SOUND-PREASURE-LEVEL**
- OPTIONAL **FIRE-DOME** & **IN-WALL/CONCRETE-DOME** AVAILABLE
- SPECIAL-COLOUR & **CHROME-PLATED** VERSIONS OBTAINABLE
- 2-WAY & 10-20-30-WATT & 8-OHMS-VERSIONS AVAILABLE
- **WEATHER-PROOFED/TROPICALIZED** & DAMP-ROOM-VERSIONS OPT.

TECHNICAL DATA:

	DLS-180F	DLS-220F	DLS-265F
Loudspeaker:	6W/120mm-broadband	10/15W-broadband with HF-dome	10/15W-broadband with HF-dome
Power-Consumption:	100V-6-3-1.5W	100V-6-3-1.5W	100V-6-3-1.5W
Frequency-Range:	80-15 000 Hz	70-18 000 Hz	70-19000Hz
SPL 1W/1m:	94 dB	95 dB	98 dB
SPL 6W/1m:	102 dB	103 dB	106 dB
SPL 1W/1m max:	104 dB (3,5 kHz)	106 dB (3,2 kHz)	105 dB (3,8 kHz)
SPL 6W/1m max:	112 dB (3,5 kHz)	114 dB (3,2 kHz)	113dB (3,8 kHz)
Radiation:	180 ° (1,8 kHz)	180° (1,5 kHz)	180° (1,4 kHz)
Dimensions:	180 mm x 80 mm	220 mm x 95 mm	265 mm x 105 mm
Depth Flat-Edition:	65 mm	65 mm	65 mm
Ceiling Cut-out:	165 mm	200 mm	240 mm
Weight:	1 Kg	1,4 Kg	1,5 Kg
Colour:	RAL 9010	RAL 9010	RAL 9010

