

CLB-265F & CLB-265F-PLUS / 8" CEILING-LOUDSPEAKER



CLB

265F

CLB


265F Plus

- **UL-94-ABS/METAL-VERSION: CLB-265F**
- **FULL-METAL-VERSION: CLB-265F-PLUS**
- OPTIONAL **FIREDOME** AVAILABLE
- **IN-WALL/CONCRETE-DOME** FOR **CLB-PLUS-VERSION** OBTAINABLE
- EASY-MOUNTING THROUGH CATCH-SPRING/BAYONET-SYSTEM
- **50-HZ-STABLE** TRANSFORMER
- **TOUCH-PROTECTED** 100-V-QUICK-CONNECTING-CLAMP
- OPTIONAL **CERAMIC-CLAMP** & **THERMO-FUSE** AVAILABLE
- **CUSTOM COLOUR & WET/DAMP-ROOM** VERSIONS VIA DLS OBTAINABLE


CEILING

LOUDSPEAKER

TECHNICAL DATA:	CLB-265F	CLB-265F-PLUS
Loudspeaker:	10/15W-8"-broadband & HF-Cone	10/15W-8"-broadband & HF-Cone
100-V-Power-Consumption:	100V-6-3-1,5W	100V-6-3-1,5W
100-V-Optional:	100V-10-5-2,5W	100V-10-5-2,5W
Frequency-Range:	70-19 000 Hz	70-19 000 Hz
SPL 1W/1m:	96 dB	96 dB
SPL 6W/1m:	104 dB	104 dB
Dimensions:	268 mm x 95mm (110 with FD)	268 x 100mm (110 mm with FD)
Ceiling Cut-Out:	245 mm	240 mm
Weight:	1,25 Kg (ca. 1,65 Kg with FD)	1,40 Kg (ca. 1,8 Kg with FD)
Material:	ABS / Metal-Grill	Metal
Colour:	White similar to RAL 9010	White similar to RAL 9010
Optional:	Firedome FT-265F	Firedome FT-265F

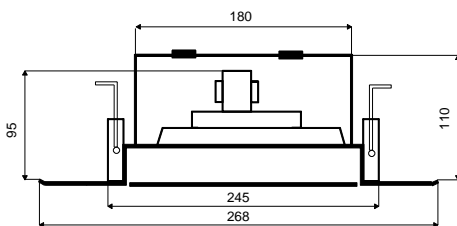

CLB-265F

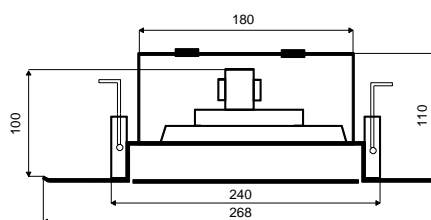

CLB-265F-PLUS