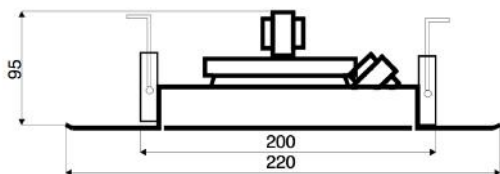


# CLB-220-DC

Ceiling-Speaker

in Metal with 2x 6 Watt Power and AB-Dual-Cone-Technique

**TECHNICAL DATA****CLB-220-DC**

Loudspeaker:	6,5" - broadband with Dual Voice Coil
Power-Consumption:	2x 100V-6-3-1,5W
Frequency-Range:	70-18 000 Hz
SPL 1W/1M max.:	95 dB (double)
SPL 6W/1M max.:	103 dB (double)
Radiation:	180° (bis 2 kHz, single)
Dimension:	220 x 95 mm
Ceiling Cut-out:	200 mm
Suitable slab thickness:	1 mm - 35 mm
Weight:	1,7 kg
Material:	Metal
Color:	white

- Two autonomous loudspeaker/100V-transformer per system
  - Enable operation of speaker via two discrete cable-lines
  - In case of breakdown of one line, continuous function of the second
  - In case of overheating of one coil, continuous function of the second
  - No phase-shift on the membrane surface
  - No bisection of the membrane surface
  - Two-part design via bayonet mounting
  - Firedome & In-Wall/Concrete dome optional
  - Ceramic clamp & thermal fuse by request
- Always check full functionality of the line monitoring before using our dual voice coil products.