


# CLB-265-AB-PLUS

Ceiling-Speaker  
in Metal with 2x 6 Watt Power for AB - Systems

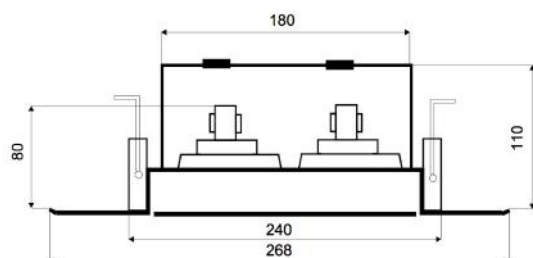

TECHNICAL DATA	CLB-265-AB-PLUS
Loudspeaker:	2x 165 x 70 mm - broadband
Power-Consumption:	2x 100V-6-3-1,5W
Frequency-Range:	70-20 000 Hz
SPL 1W/1M:	93 dB (double)
SPL 6W/1M:	101 dB (double)
Radiation:	180° (bis 1,6 kHz)
Dimension:	268 x 80 mm (110 mm with firedome)
Ceiling Cut-out:	240 mm
Suitable slab thickness:	1 mm - 35 mm
Weight:	1,6 kg (ca. 2 kg with firedome)
Material:	Metal
Color:	white

- Two autonomous loudspeaker/100V-transformer per system
- Enables operation of speaker via two discrete cable-lines
- In case of failure of one line, continuous function of the second line
- Two-part design via bayonet mounting
- ABS/Metal-version available
- Firedome & In-Wall/Concrete dome - optional
- Touch-secure 100V-tappings
- Ceramic clamp & thermal fuse by request