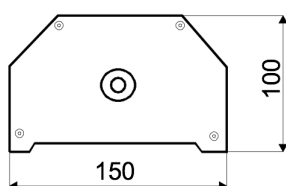
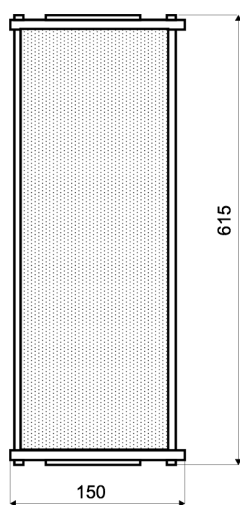


CS-50WA-AB

Column-Speaker for Outdoor Use
in ALU / SS with 2x 30 Watt Power for AB - Systems

**TECHNICAL DATA****CS-50WA-AB**

Loudspeaker:	2 x 2 broadband
Power-Consumption:	2x 100V-30-15-7,5W
Frequency-Range:	70-18 000 Hz
SPL 1W/1M:	98 dB (double)
SPL 30W/1M:	115 dB (double)
Radiation H/V:	210° / 182° (1 kHz, single)
Dimension:	615 x 150 x 100 mm
Weight:	3,9 kg
Material:	ALU / Stainless Steel
Color:	black or white / Holder stainless steel
Order-Nr.:	CS-50WA-AB-BK
	CS-50WA-AB-WH

- 2 x 2 speakers over splitted front
- Weather-proof through Aluminium-casing
- Alu-Grill & ABS-Inner-Panel, Stainless Steel bracket & screws
- Ball-attack certified version acc. to DIN 18032-3 obtainable
- Touch-secure 100V-tappings
- Ceramic clamp & thermal fuse by request