
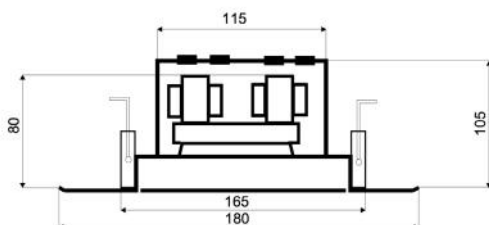


DLS-180-DC

Ceiling-Speaker

in Metal with 2x 6 Watt Power and AB-Dual-Cone-Technique

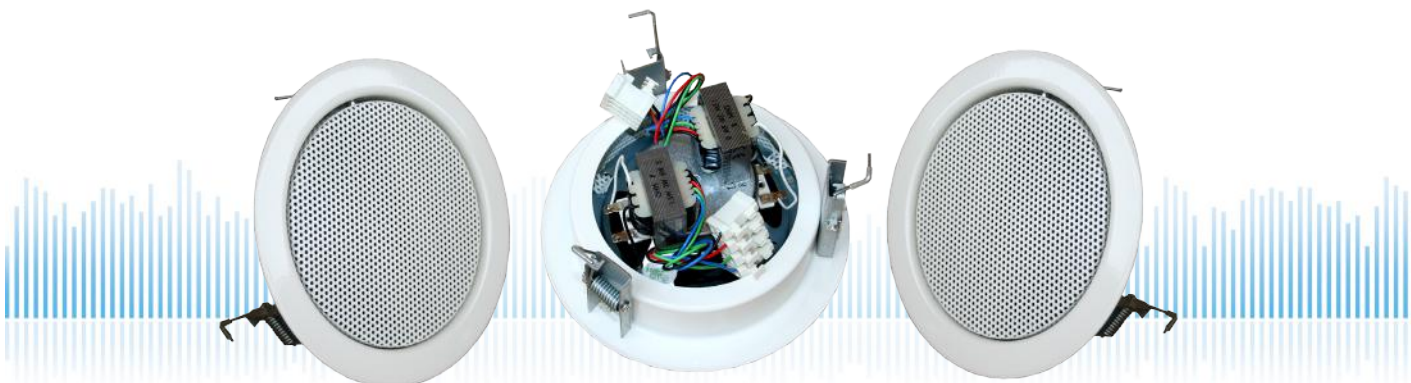

TECHNICAL DATA	DLS-180-DC
Loudspeaker:	5" - broadband with Dual Voice Coil
Power-Consumption::	2x 100V-6-3-1,5W
Frequency-Range:	80-17 000 Hz
SPL 1W/1M max.:	95 dB (double)
SPL 6W/1M max.:	103 dB (double)
Radiation:	180° (bis 2,3 kHz)
Dimension:	180 x 80 mm
Ceiling Cut-out:	165 mm
Suitable slab thickness:	1 mm - 35 mm
Weight:	1,4 kg
Material:	Metal
Color:	RAL 9010 / opt. RAL Classic

- Two autonomous loudspeaker/100V-transformer per system
 - Enable operation of speaker via two discrete cable-lines
 - In case of breakdown of one line, continuous function of the second
 - In case of overheating of one coil, continuous function of the second
 - No phase-shift on the membrane surface
 - No bisection of the membrane surface
 - Two-part design via bayonet mounting
 - Ball-attack protection according DIN 18032-3 optional
 - Firedome & In-Wall/Concrete dome optional
 - Custom colors and wet-room version by request
 - Ceramic clamp & thermal fuse by request
- Always check full functionality of the line monitoring before using our dual voice coil products..