


DLS-180F-II-10W

Ceiling-Speaker
in Metal with 10 Watt Power and 2-Way - Technology

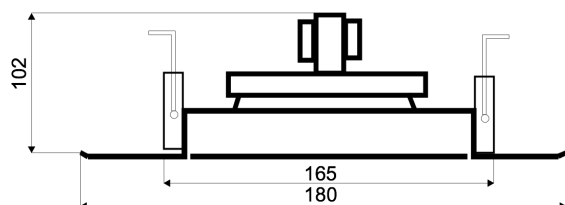

TECHNICAL DATA

DLS-180F-II-10W

| | |
|--------------------------|-----------------------------|
| Loudspeaker: | 120 mm - 2-Way-System |
| Power-Consumption: | 100V-10-5-2,5W |
| Frequency-Range: | 70-18 000 Hz |
| SPL 1W/1M: | 95 dB |
| SPL 10W/1M: | 103 dB |
| SPL 1W/1M max.: | 104 dB (3,5 kHz) |
| SPL 10W/1M max.: | 112 dB (3,5 kHz) |
| Radiation: | 180° (1,8 kHz) |
| Dimension: | 180 mm x 102 mm |
| Ceiling Cut-out: | 165 mm |
| Suitable slab thickness: | 1 mm - 35 mm |
| Weight: | 1,1 kg |
| Material: | Metal |
| Color: | RAL 9010 / opt. RAL Classic |

- Two-part design via bayonet mounting
- Three touch-secure 100V-tappings
- Ball-attack protection according DIN 18032-3 optional
- Optional firedome & In-wall/concrete-dome obtainable
- Custom colors and wet-room version by request
- 6/20W & 8 Ohm-Versions optional
- Ceramic clamp & thermal fuse by request