
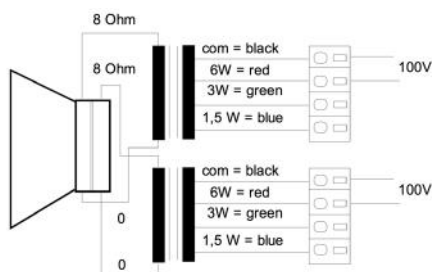


DLS-220-DC/EN5424

EN 54-24 Ceiling-Speaker

in Metal with 2x 6 Watt Power and AB-Dual-Cone-Technique

EN
54-24

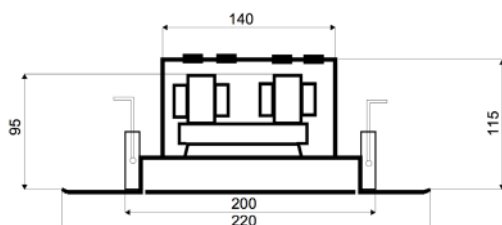

TECHNICAL DATA

DLS-220-DC/EN5424

Loudspeaker:	6,5" - Breitband with Dual Voice Coil
Power-Consumption:	2x 100V-6-3-1,5W
Frequency-Range:	70-18 000 Hz
EN-Sensitivity 1W/4M:	76 dB (single), 82 dB (double)
SPL max 6W/4M:	86,6 dB (single), 92,6 dB (double)
SPL 1W/1M max. EASE/Ulysses:	105 dB (3,2 kHz) (double)
SPL 6W/1M max. EASE/Ulysses:	110 dB (3,2 kHz) (double)
Radiation H (0,5/1/2/4KHz):	180°/180°/158°/80° (single)
Radiation V (0,5/1/2/4KHz):	180°/180°/158°/80° (single)
Dimension:	220 x 115 mm with firedome
Ceiling Cut-out:	200 mm
Suitable slab thickness:	1 mm - 35 mm
Weight:	1,7 kg
Material:	Metal
Color:	RAL 9010 / white / opt. RAL-Classic
Certificate-Nr.:	1293-CDP-0336
Order-Nr.:	DLS-220-DC/EN5424-RAL9010 DLS-220-DC/EN5424-WHITE

- Two autonomous loudspeaker/100V-transformer per system
- No bisection of the membrane surface
- In case of breakdown of one line, continuous function of the second
- Two-part design via bayonet mounting
- Ball-attack protection according DIN 18032-3 included
- Custom colors and wet-room version by request
- Ceramic clamp & thermal fuse by request
- Always check full functionality of the line monitoring before using our dual voice coil products.





DLS-220-DC/EN5424

EN 54-24 Ceiling-Speaker

in Metal with 2x 6 Watt Power and AB-Dual-Cone-Technique

Elektroakustische Komponenten

Radiation

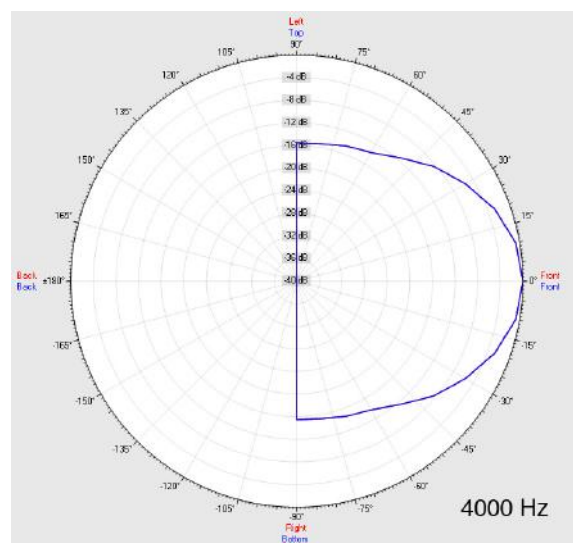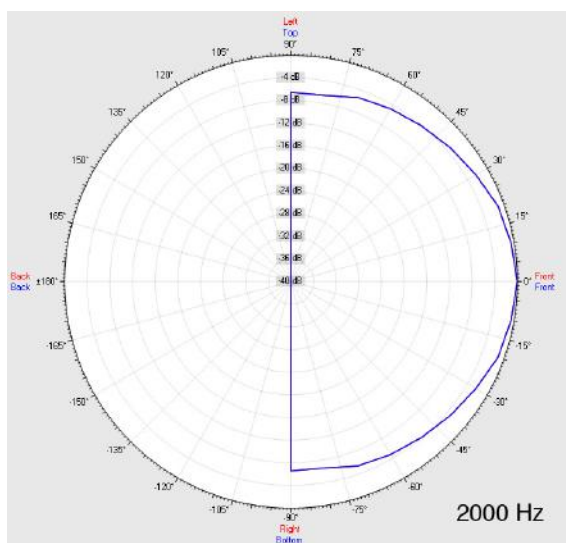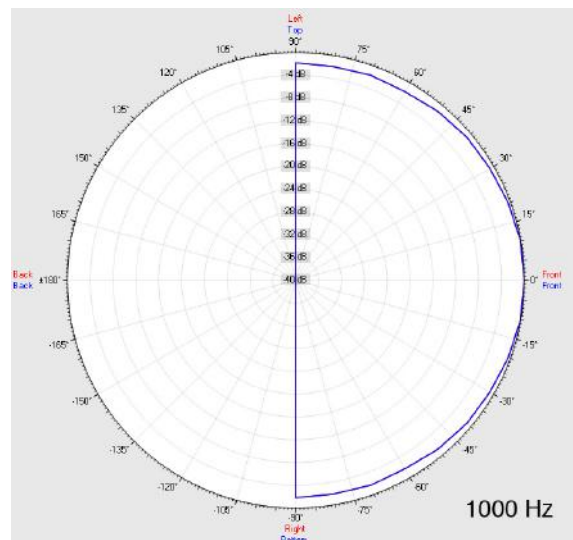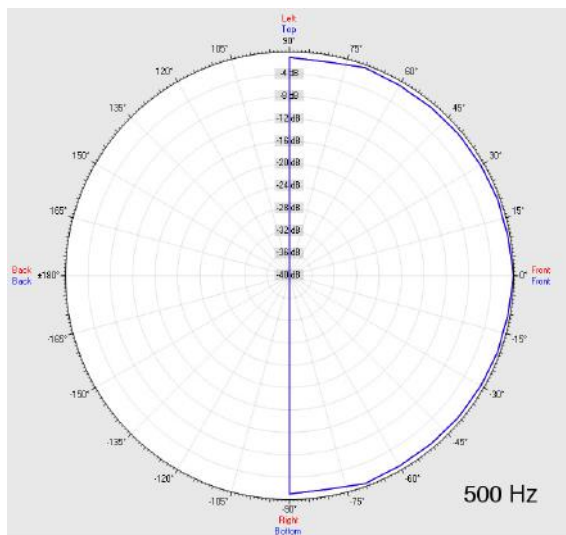


Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	180°	180°	158°	80°
EN 54-24	VER	180°	180°	158°	80°
EASE/Ulysses	HOR	180°	180°	180°	60°
EASE/Ulysses	VER	180°	180°	180°	60°

DLS-220-DC/EN5424

EN 54-24 Ceiling-Speaker

in Metal with 2x 6 Watt Power and AB-Dual-Cone-Technique

Isobar-diagram

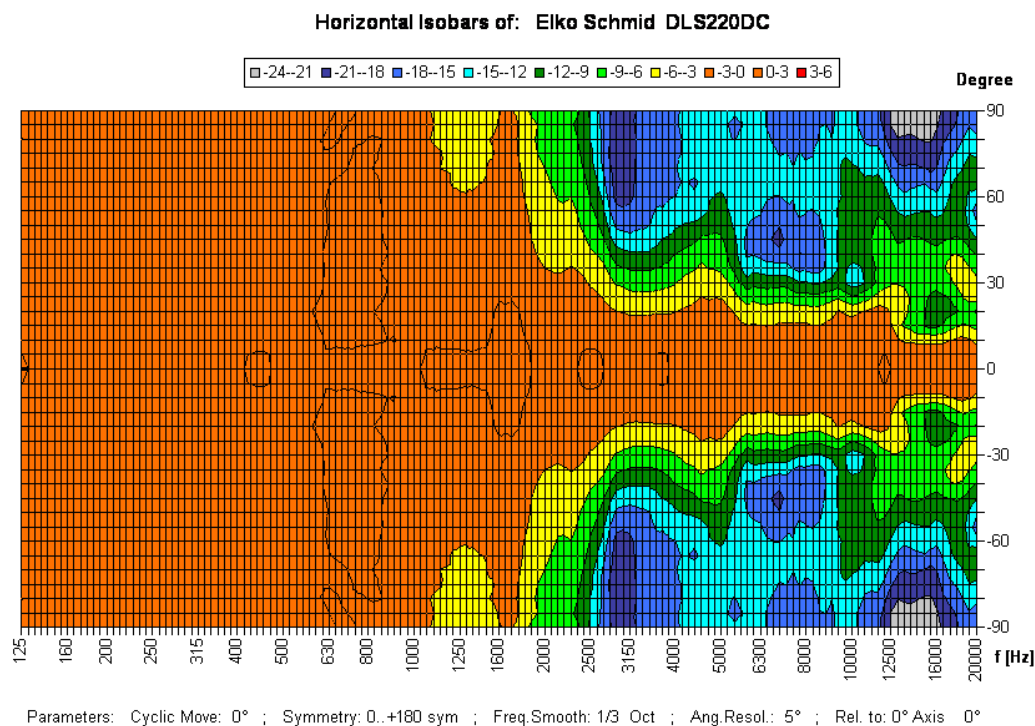


1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

12

DoP: 498058129314-ICS-PN-0003

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

DLS-220-DC/EN5424

Intended Option:
Type A