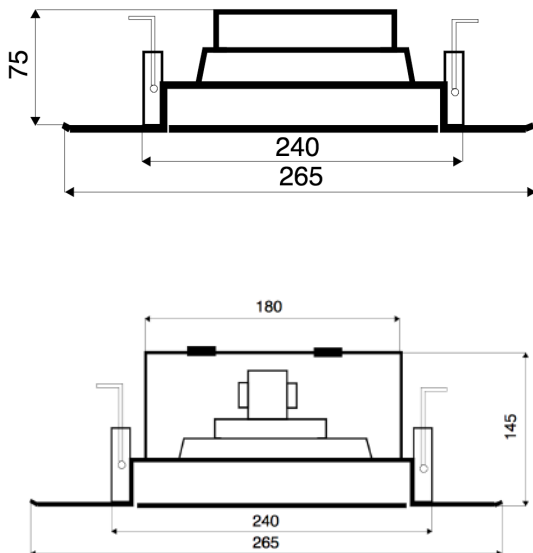


DLS-265F-30W-E-SONIC-808

Ceiling-Speaker
in Metal with 30 Watt Power and 2-Way - Technology

**TECHNICAL DATA****DLS-265F-30W-E-SONIC-808**

Loudspeaker:	8" - 2-Way-System
Power-Consumption:	100V-30-20-10-6-3W 100V-20-10-5W optional 100V-10-5-2,5W optional
Frequency-Range:	50-20 000 Hz
SPL 1W/1M:	100 dB
SPL 30W/1M:	115 dB
SPL 1W/1M max. EASE/Ulysses:	104 dB (1,3kHz)
SPL 30W/1M max. EASE/Ulysses:	118 dB (1,3kHz)
Radiation H (0,5/1/2/4):	180°/180°/83°/38°
Radiation V (0,5/1/2/4):	180°/180°/83°/38°
Dimension:	265 mm x 115 mm (10W) 265 mm x 124 mm (20W + 30W)
Ceiling Cut-out:	240 mm
Suitable slab thickness:	1 mm - 35 mm
Weight:	2,4 kg
Material:	Metal
Color:	RAL 9010 / opt. RAL Classic

- EASE & Ulysses measured by Audio Acoustic Aachen
- Two-part design via bayonet mounting
- High-Quality 2-way-system for advanced ELA-application
- Humidity resistant coating of the membrane
- Ball-attack protection according DIN 18032-3 optional
- Optional firedome & In-wall/concrete-dome obtainable
- Custom colors and wet-room version by request
- Optional six-piece bayonet system (20/30W) included
- Ceramic clamp & thermal fuse by request