
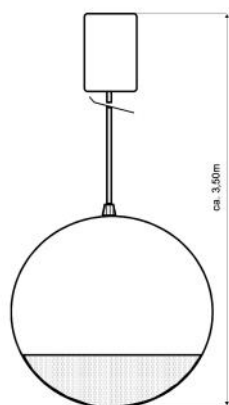


KM-180-DC

Sphere-Speaker

in Metal with 2x 6 Watt Power and AB-Dual-Cone-Technique

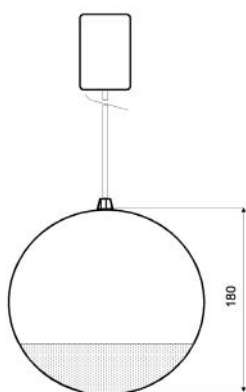

TECHNICAL DATA

KM-180-DC

Loudspeaker:	5" - broadband with Dual Voice Coil
Power-Consumption:	2x 100V-6-3-1,5W
Frequency-Range:	80-17 000 Hz
SPL 1W/1M:	95 dB (double)
SPL 6W/1M:	103 dB (double)
Radiation:	360° (bis 1,2 kHz)
Dimension:	180 mm (d)
Weight:	1,9 kg
Material:	Metal
Color:	white / optional steel-look
Order-Nr.:	KM-180-DC-WH
	KM-180-DC-CHD

- Two autonomous loudspeaker/100V-transformer per system
 - Enable operation of speaker via two discrete cable-lines
 - In case of breakdown of one line, continuous function of the second
 - In case of overheating of one coil, continuous function of the second
 - No phase-shift on the membrane surface
 - No bisection of the membrane surface
 - Stainless-Steel-Look optional
 - Ceramic clamp & thermal fuse by request
- Always check full functionality of the line monitoring before using our dual voice coil products.