



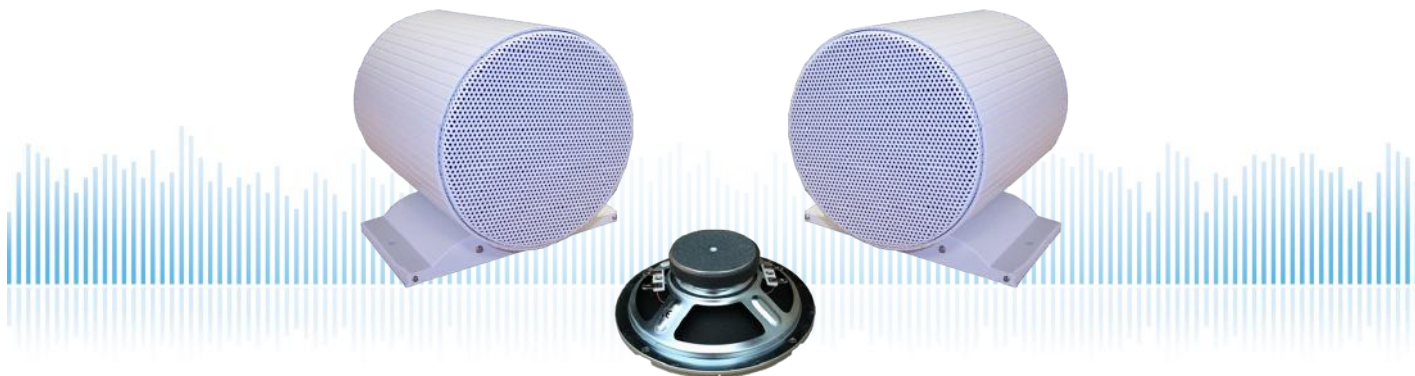
LA-130BI-12W-DC

Projector-Speaker

in ALU with 2x 12 Watt Power and AB-Dual-Cone-Technique

**ELKO
SCHMID**

Elektroakustische Komponenten

**TECHNICAL DATA****LA-130BI-12W-DC**

Loudspeaker:	2x 5" - Dual Voice Coil
Power-Consumption:	2x 100V-12-6-3W
Frequency-Range:	80-17 000 Hz
SPL 1W/1M:	95 dB (double)
SPL 12W/1M:	105 dB (double)
Radiation:	360°
Dimension:	145 (∅) x 186 mm, 175 mm socket width
Weight:	3,5 kg
Material:	ALU
Color:	white

- Two autonomous 100V-transformers per system
 - Four fully independent systems / two DC-systems per sound direction
 - In case of breakdown of one line, continuous function of the second
 - In case of overheating of one coil, continuous function of the second
 - Ceramic clamp & thermal fuse by request
-
- Always check full functionality of the line monitoring before using our dual voice coil products.