
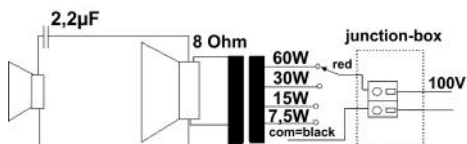


Lounge-250T/EN5424

EN 54-24 Ceiling-Speaker

in ABS/Metal with 60 Watt Power and 2-Way-Technology

EN
54-24

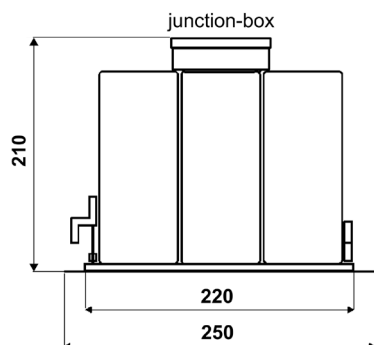

TECHNICAL DATA

Lounge-250T/EN5424

Loudspeaker:	165mm - Coax-Speaker
Power-Consumption:	100V-60-30-15-7,5W
Frequency-Range:	60-22 000 Hz
EN-Sensitivity 1W/4M:	76 dB
SPL max 60W/4M:	95,5 dB
SPL 1W/1M max. EASE/Ulysses:	97 dB (2,5 kHz)
SPL 60W/1M max. EASE/Ulysses:	114 dB (2,5 kHz)
Radiation H (0,5/1/2/4KHz):	180°/180°/111°/46°
Radiation V (0,5/1/2/4KHz):	180°/180°/111°/46°
Dimension:	250 mm x 210 mm with firedome and box
Ceiling Cut-out:	220 mm
Suitable slab thickness:	12 mm - 38 mm
Weight:	3,1 kg
Material:	Grill+Case: Metal, Ring: ABS-5VB
Color:	white
Certificate-Nr.:	1293-CPR-0623
Order-Nr.:	Lounge-250T/EN5424

- High-Class Music Performance suitable Bars, Restaurants, Lounges etc.
- High-End Coaxial System with HF-Horn
- Special-folded Bass-Reflex-Enclosure
- Touch-secure 100V-tappings via rotary-switch
- Integrated clamp terminal / Fall Arrester optional
- Custom color & wet-room application with Alu-grill by request
- Ceramic clamp & thermal fuse by request





Lounge-250T/EN5424

EN 54-24 Ceiling-Speaker

in ABS/Metal with 60 Watt Power and 2-Way-Technology



Radiation

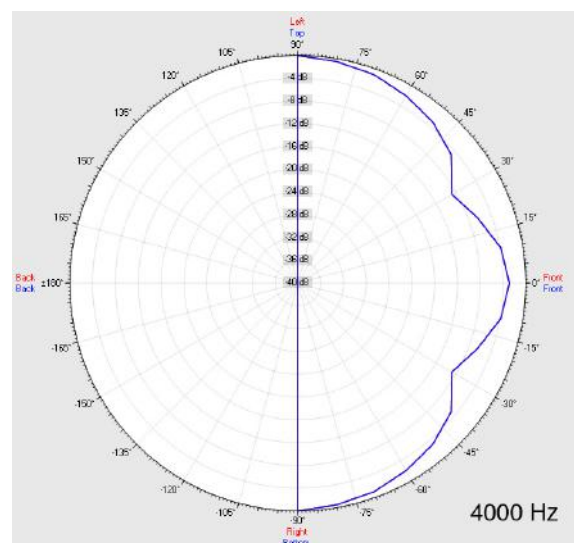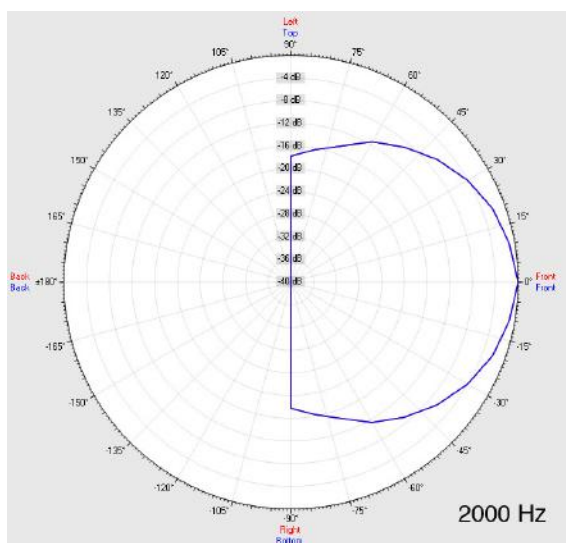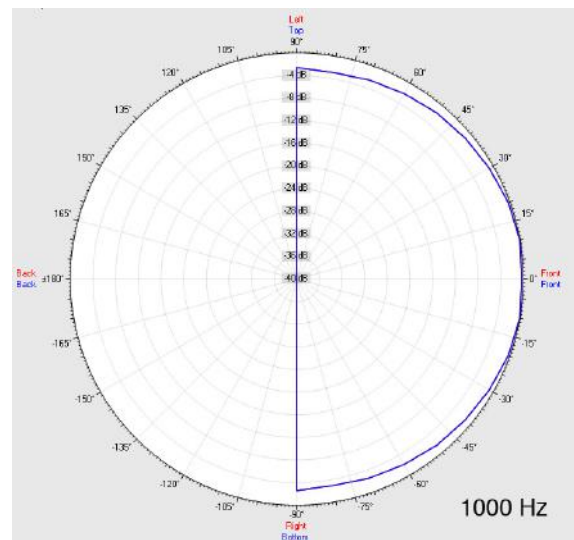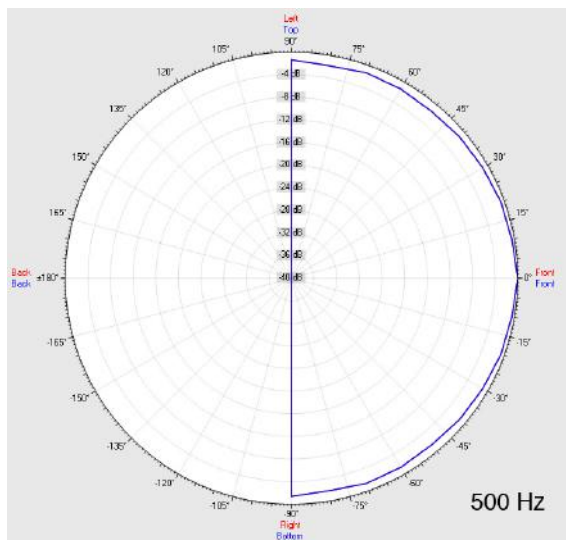

Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	180°	180°	111°	46°
EN 54-24	VER	180°	180°	111°	46°
EASE/Ulysses	HOR	180°	180°	75°	60°
EASE/Ulysses	VER	180°	180°	75°	60°

Lounge-250T/EN5424


EN 54-24 Ceiling-Speaker

in ABS/Metal with 60 Watt Power and 2-Way-Technology



Elektroakustische Komponenten

Isobar-Diagramm

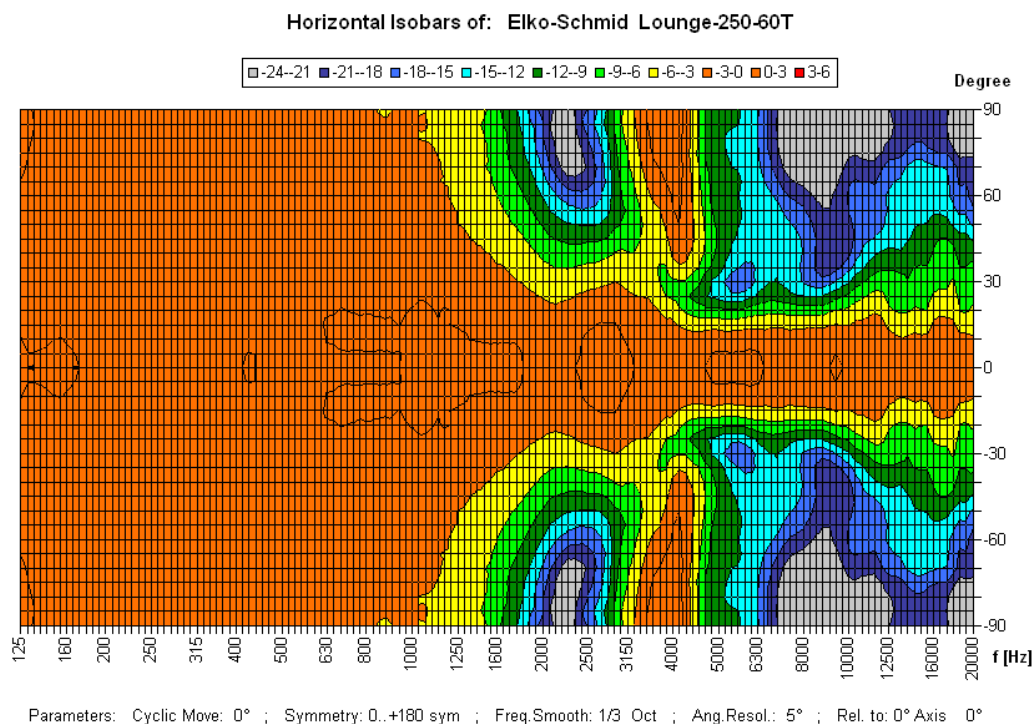

CE

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

13

DoP: 498058129314-ICS-PN-0007

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

Lounge-250T/EN5424

Intended Option:
Type A