
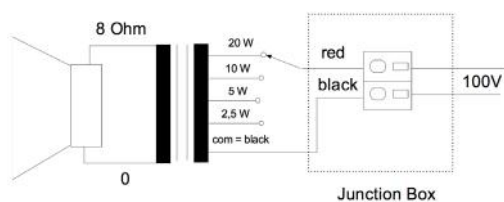

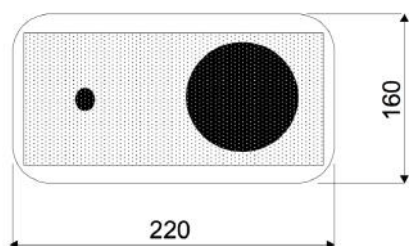


ML-200/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker
in ABS with 20 Watt Power

EN
54-24

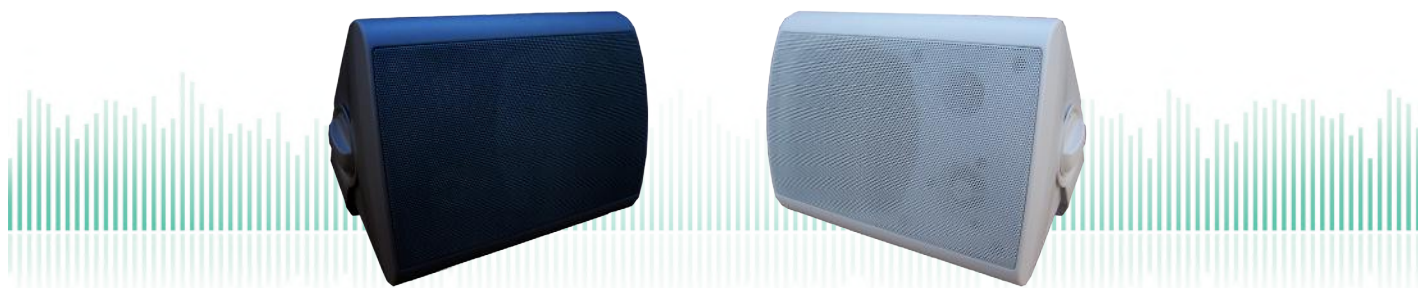

TECHNICAL DATA

ML-200/EN5424





Loudspeaker:	2-Way - System
Power-Consumption:	100V-20-10-5-2,5W
Frequency-Range:	80-20 000 Hz
EN-Sensitivity 1W/4M:	72 dB
SPL max 20W/4M:	85 dB
SPL 1W/1M max. EASE/Ulysses:	91 dB (6,5 kHz)
SPL 20W/1M max. EASE/Ulysses:	104 dB (6,5 kHz)
Radiation H (0,5/1/2/4KHz):	360°/335°/130°/81°
Radiation V (0,5/1/2/4KHz):	360°/317°/172°/88°
Dimension:	220 x 160 x 140 (160) mm
Weight:	1,9 kg
Material:	ABS
Color:	black or white
Certificate-Nr.:	1293-CPD-0384
Order-Nr.:	ML-200/EN5424-BK ML-200/EN5424-WH

- Spezial DIN 912-ISO 4762 screws
- Very fast mounting through wall mounting bracket
- Quick power-change through rotary switch on rear panel
- Flame retardent material acc. to EN 60695-11-20, 5VB
- 100V-tappings with junction box
- Ceramic clamp & thermal fuse by request

ML-200/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker
in ABS with 20 Watt Power

Radiation

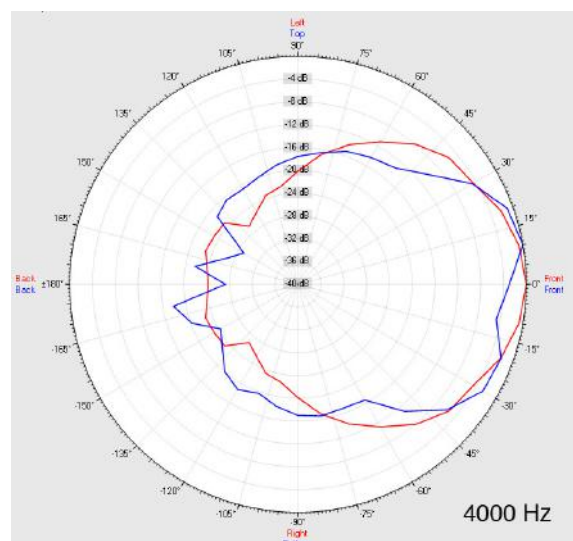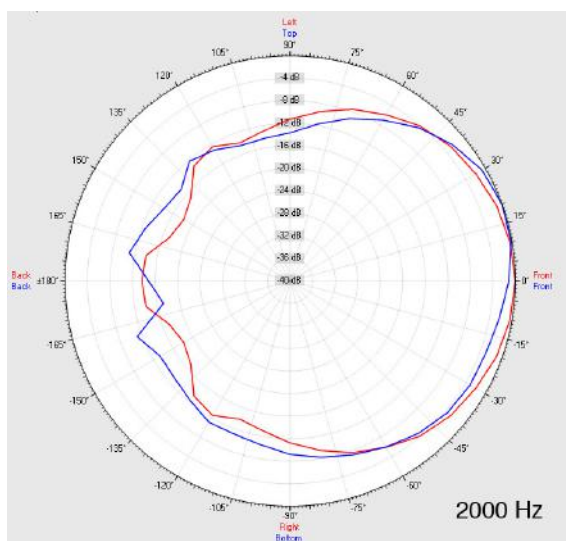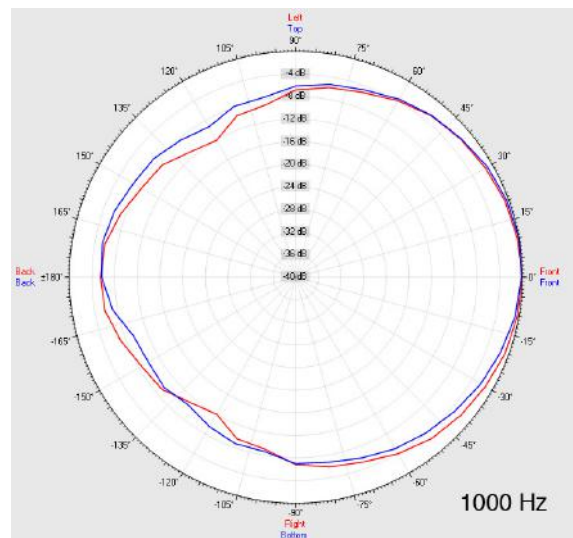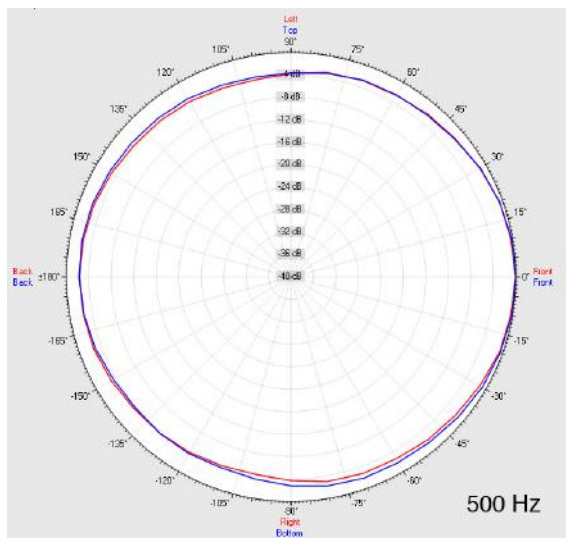

Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	360°	335°	130°	81°
EN 54-24	VER	360°	317°	172°	88°
EASE/Ulysses	HOR	360°	160°	125°	75°
EASE/Ulysses	VER	360°	160°	135°	85°



ML-200/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker
in ABS with 20 Watt Power



Elektroakustische Komponenten

Isobar-Diagramm

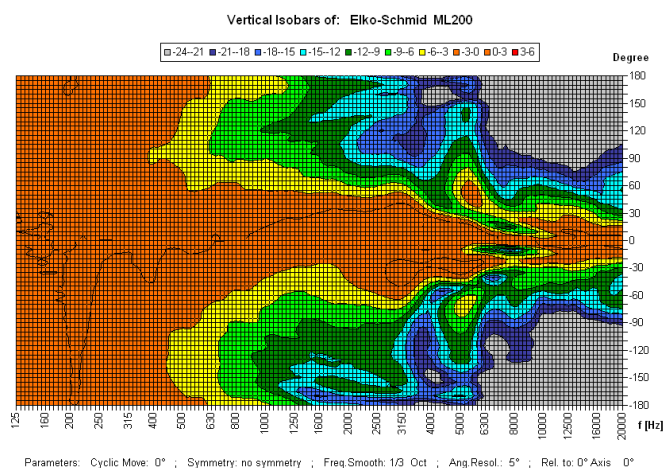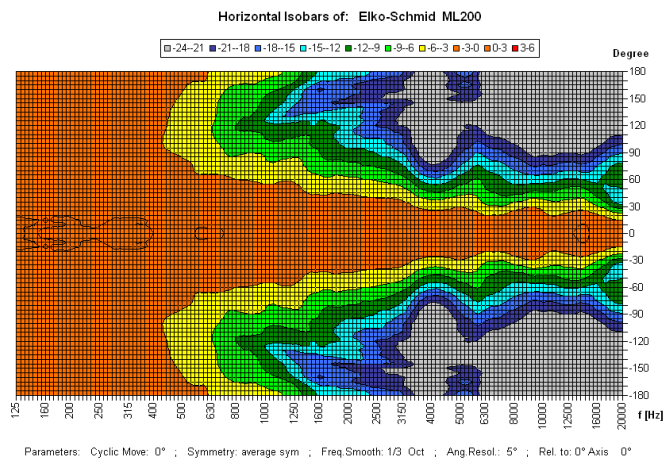

CE

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

13

DoP: 498058129314-OWS-PN-0008

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

ML-200/EN5424

Intended Option:
Type A