
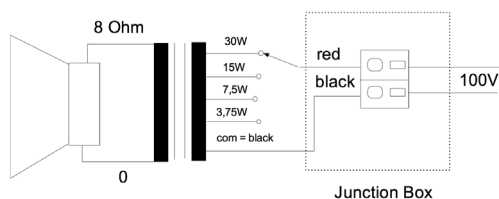



ML-260/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker
in ABS with 30 Watt Power

EN
54-24

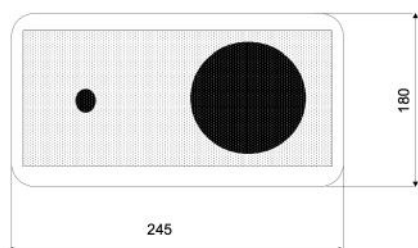

TECHNICAL DATA

ML-260/EN5424





Loudspeaker:	2-Way - System
Power-Consumption:	100V-30-15-7,5-3,75W
Frequency-Range:	60-20 000 Hz
EN-Sensitivity 1W/4M:	73 dB
SPL max 30W/4M:	87,9 dB
SPL 1W/1M max. EASE/Ulysses:	92 dB (5,5 kHz)
SPL 30W/1M max. EASE/Ulysses:	107 dB (5,5 kHz)
Radiation H (0,5/1/2/4KHz):	360°/179°/123°/84°
Radiation V (0,5/1/2/4KHz):	360°/182°/138°/82°
Dimension:	245 x 180 x 165 (185) mm
Weight:	2,6 kg
Material:	ABS
Color:	black or white
Certificate-Nr.:	1293-CPR-0629
Order-Nr.:	ML 260/EN5424-BK ML 260/EN5424-WH

- Spezial DIN 912-ISO 4762 screws
- Very fast mounting through wall mounting bracket
- Quick power-change through rotary switch on rear panel
- Flame retardent material acc. to EN 60695-11-20, 5VB
- 100V-tappings with junction box
- Weather-proof version available (ML-260WT/EN5424)
- Ceramic clamp & thermal fuse by request

ML-260/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker
in ABS with 30 Watt Power

Radiation

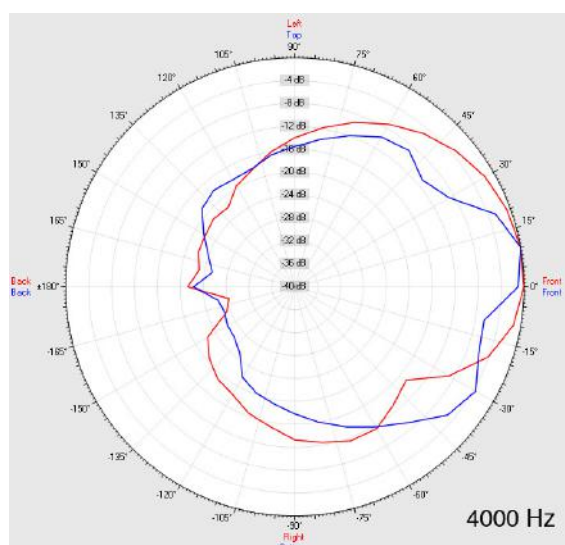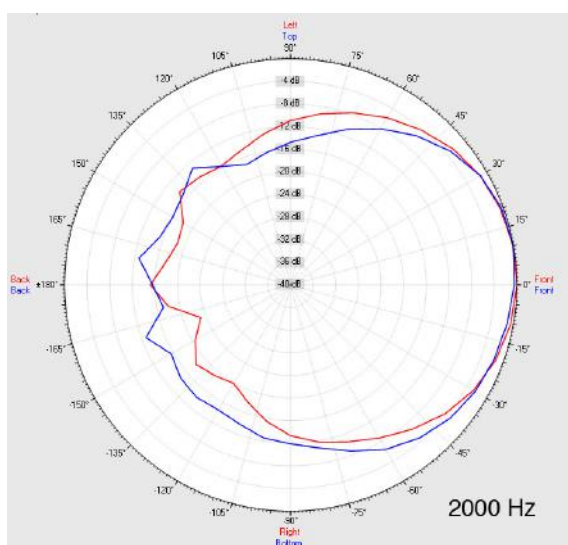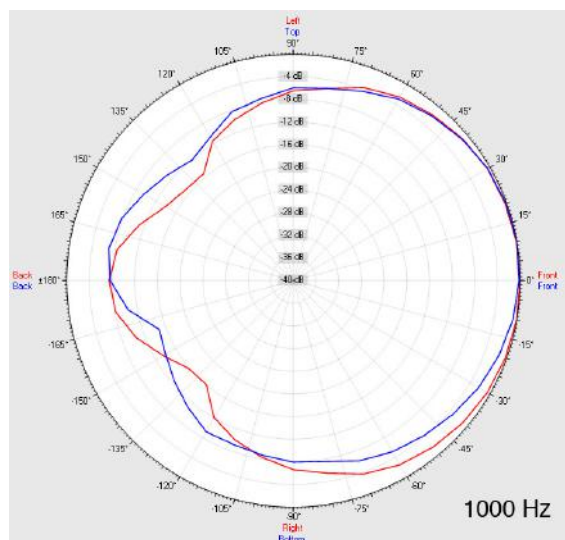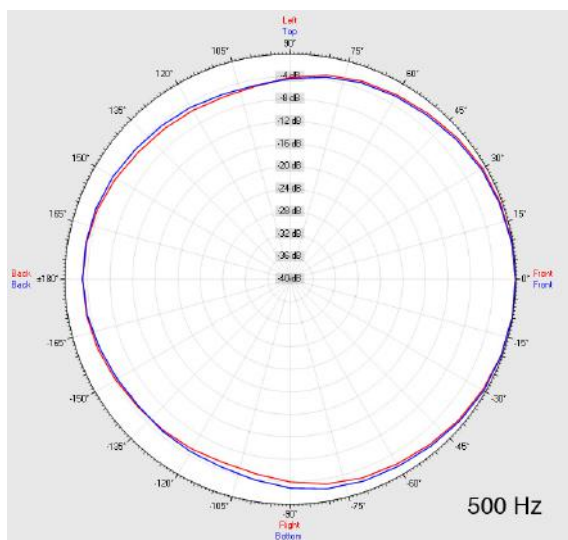

Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	360°	179°	123°	85°
EN 54-24	VER	360°	182°	138°	82°
EASE/Ulysses	HOR	360°	165°	115°	80°
EASE/Ulysses	VER	360°	160°	115°	70°



ML-260/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker
in ABS with 30 Watt Power



Elektroakustische Komponenten

Isobar-Diagramm

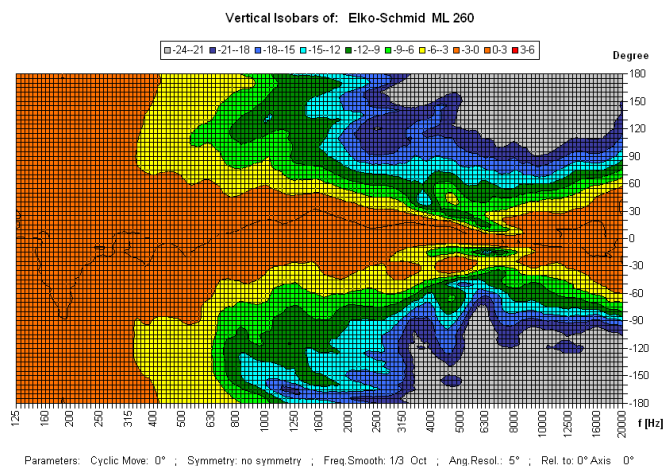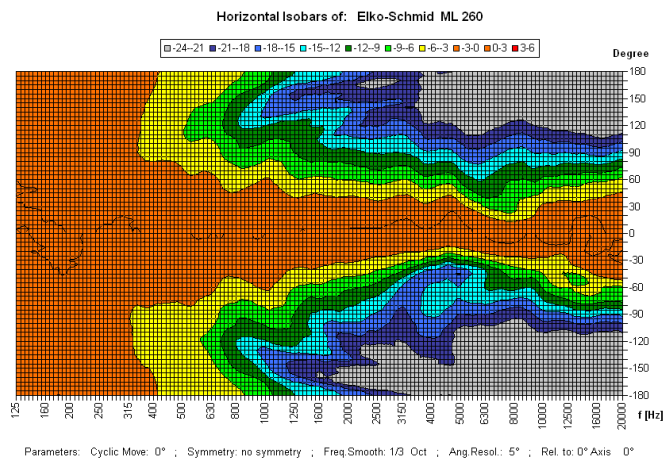

CE

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

12

DoP: 498058129314-OWS-PN-0008

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

ML-260/EN5424

Intended Option:
Type A