
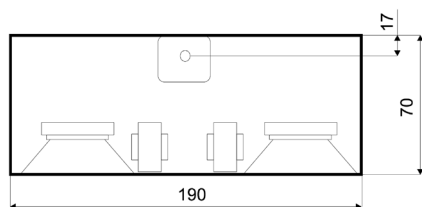



# RG-190-AB

On-Wall / Ceiling-Speaker  
in Metal with 2x 10 Watt Power for AB - Systems

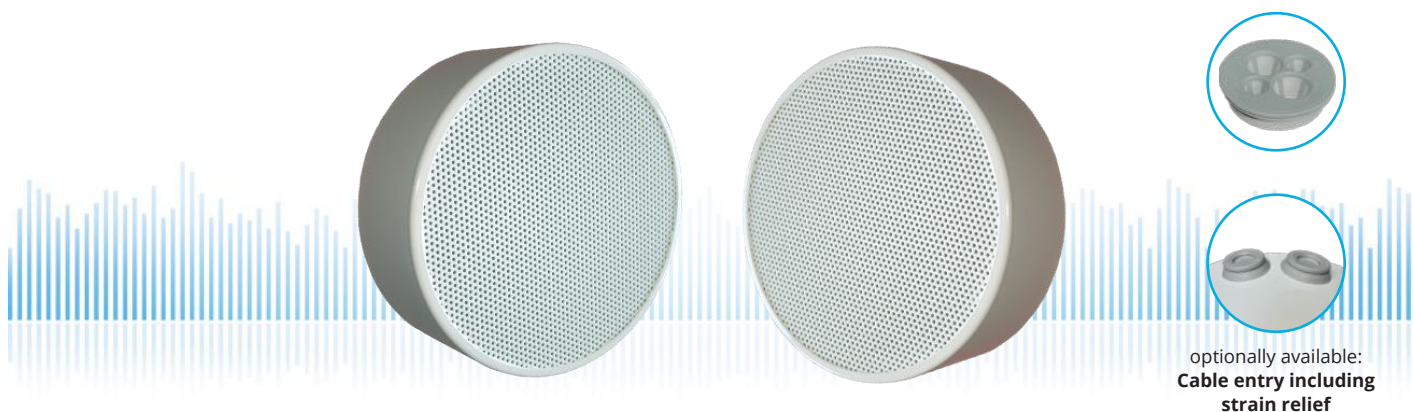

## TECHNICAL DATA

## RG-190-AB

Loudspeaker:	2x 120 x 70 mm broadband
Power-Consumption:	2x 100V-10-6-3-1,5W
Frequency-Range:	100-16 000 Hz
SPL 1W/1M max.:	91 dB (1,2 kHz)
SPL 10W/1M max.:	106 dB (1,2 kHz)
Radiation:	180° (bis 1kHz)
Dimension:	190 x 70 mm
Weight:	1,5 kg
Material:	Metal
Color:	RAL 9010 / opt. RAL Classic

- Two autonomous loudspeaker/100V-transformer per system
- Enables operation of speaker via two discrete cable-lines
- In case of failure of one line, continuous function of the second line
- Ball-attack protection according DIN 18032-3 by request
- Custom colors & wet-room-version obtainable
- Touch-secure 100V-tappings
- Ceramic clamp & thermal fuse by request
- Optional cable entry including strain relief available
- Optional multiple entry can be used if necessary