
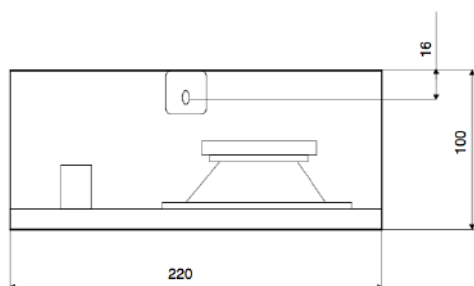



RG-220-AB

On-Wall / Ceiling-Speaker
in Metal with 2x 6 Watt Power for AB - System

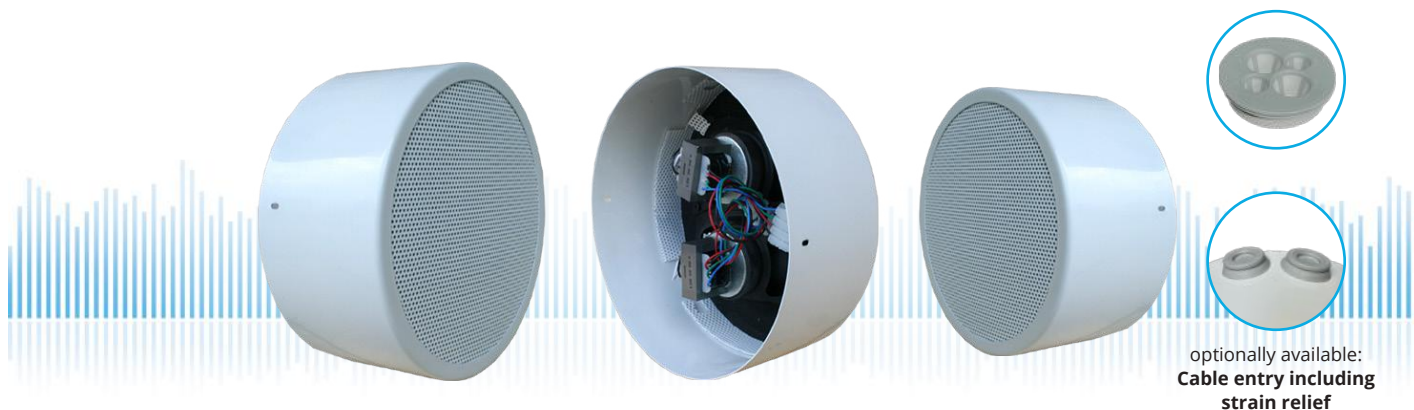

TECHNICAL DATA

RG-220-AB

Loudspeaker: 2x 165 x 70 mm broadband

Power-Consumption: 2x 100V-6-3-1,5W

Frequency-Range: 80-20 000 Hz

SPL 1W/1M: 93 dB (double)

SPL 6W/1M: 101 dB (double)

Dimension: 220 x 100 mm

Weight: 1,8 kg

Material: Metal

Color: RAL 9010 / opt. RAL Classic

- Two autonomous loudspeaker/100V-transformer per system
- Enables operation of speaker via two discrete cable-lines
- In case of failure of one line, continuous function of the second line
- Ball-attack protection according DIN 18032-3 by request
- Custom colors obtainable
- Touch-secure 100V-tappings
- Ceramic clamp & thermal fuse by request
- Optional cable entry including strain relief available
- Optional multiple entry can be used if necessary