
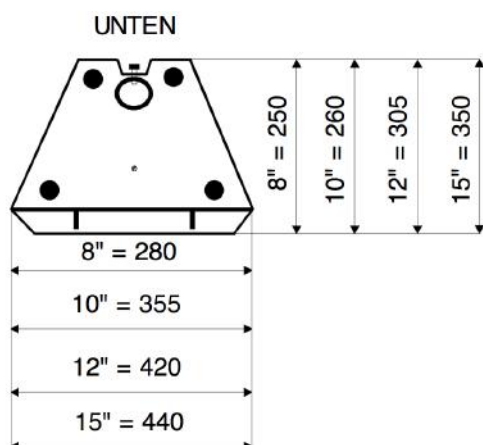


SUPERSONIC-12

P.A.-Speaker
in ABS with 300 Watt Power

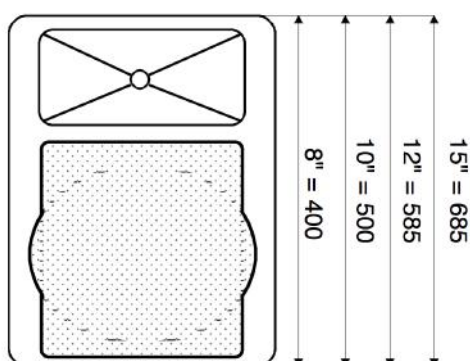

TECHNICAL DATA

SUPERSONIC-12

Loudspeaker:	12" LF + 1,25" HF
Power-Consumption:	300W / 80hm
Connection:	2x Speakon
Frequency-Range:	45-20 000 Hz
SPL 1W/1M:	98 dB / 102 dB Peak
SPL 300W/1M:	123 dB / 127 dB Peak
Radiation H/V:	80° / 80° (1 kHz)
Dimension:	585 x 420 x 305 mm
Weight:	19,7 kg
Material:	ABS
Color:	black

- Bassreflex-ABS-Enclosure
- Built In 37mm Stand-Flange
- Side integrated carry handle
- 10" and 15" version available
- Ball-attack certified version acc. to DIN 18032-3 optional

Optional add-ons:

- 100V/100-75-50W transformer (toroidal)
- 100V/100-50-25W transformer (wound core)
- 100V/200-150-100W transformer (toroidal or wound core)
- PA-WH-45 wall mounting bracket
- BSW-15 ballprotection-safety-device (0°/15°)
- BSW-22 ballprotection-safety-device (15°/22°)
- BSW-3-PLUS ballprotection-safety-device (0°/15°/22°)
- SBS-12 & DSA-12 Cable suspension / flight assembly set
- Speakon-connector