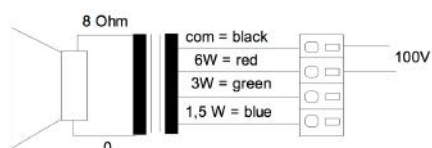
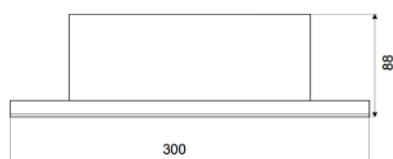
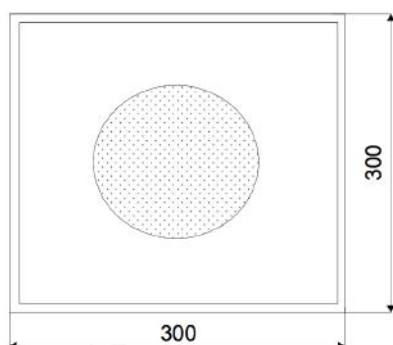
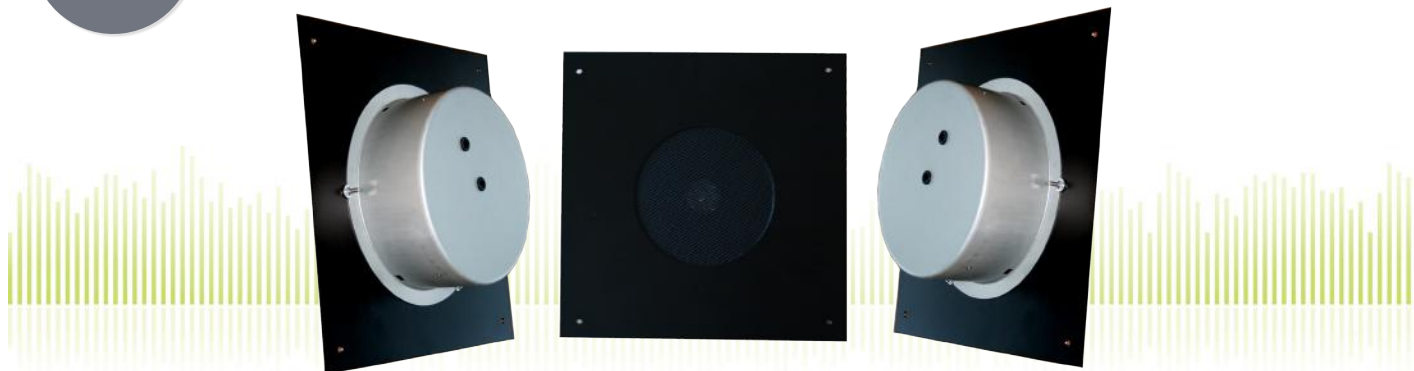


**SW-E21-FT/EN5424**

EN 54-24 Acoustic Panel  
in Metal with 6 Watt Power

EN  
54-24

**TECHNICAL DATA****SW-E21-FT/EN5424**





Loudspeaker:	6,5" - broadband with HF-Cone
Power-Consumption:	100V-6-3-1,5W
Frequency-Range:	70-18 000 Hz
EN-Sensitivity 1W/4M:	79 dB
SPL max 6W/4M:	90,7 dB
SPL 1W/1M max. EASE/Ulysses:	100 dB (1,5 kHz)
SPL 6W/1M max. EASE/Ulysses:	107 dB (1,5 kHz)
Radiation H (0,5/1/2/4kHz):	180°/180°/161°/61°
Radiation V (0,5/1/2/4kHz):	180°/180°/161°/61°
Dimension:	300 x 300 x 88 mm
Weight:	2,3 kg
Material:	Metal
Color:	RAL 9005
Certificate-Nr.:	1293-CPD-0360
Order-Nr.:	SW-E21-FT/EN5424

- Fire-protected Full-Metal-Version
- Rear fire-protection-dome
- Front-Protection-Grill
- Foam-Rubber-Anti-Vibration-Stripes
- Three touch-secure 100V-tappings
- Ceramic clamp & thermal fuse by request

**SW-E21-FT/EN5424**

EN 54-24 Acoustic Panel  
in Metal with 6 Watt Power

## Radiation

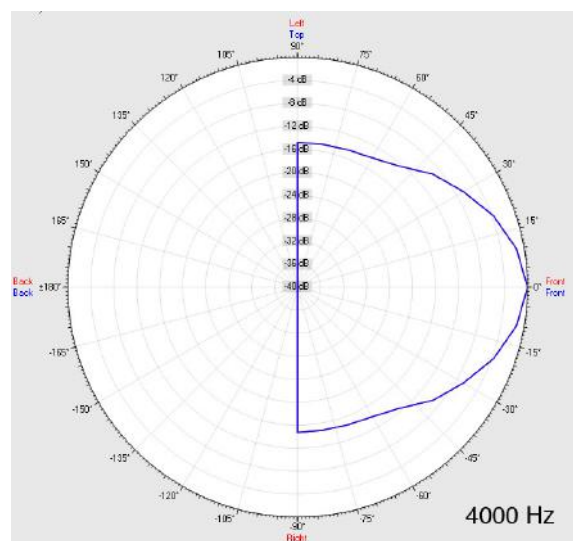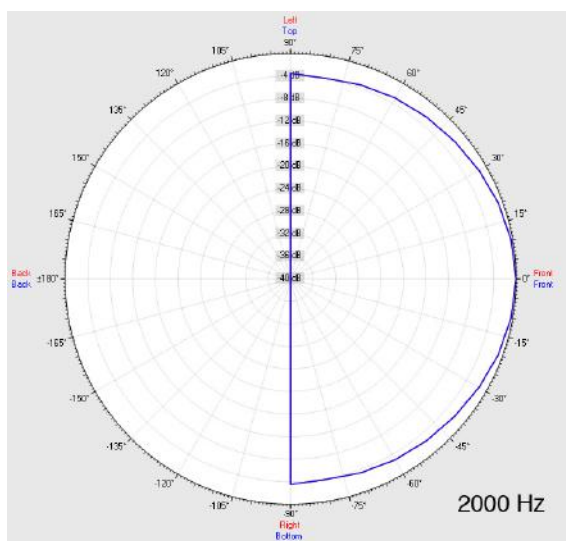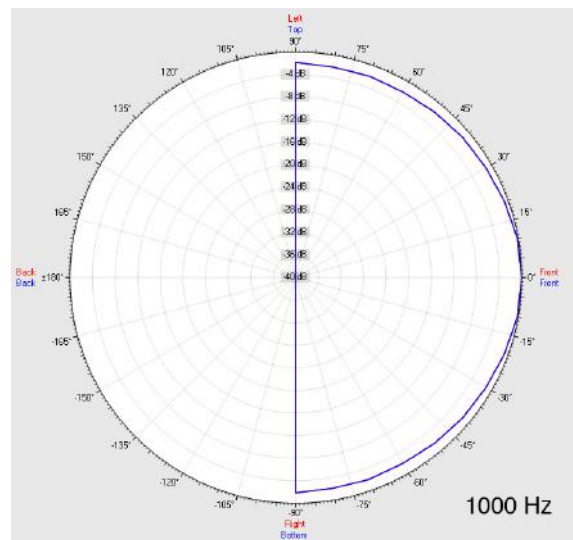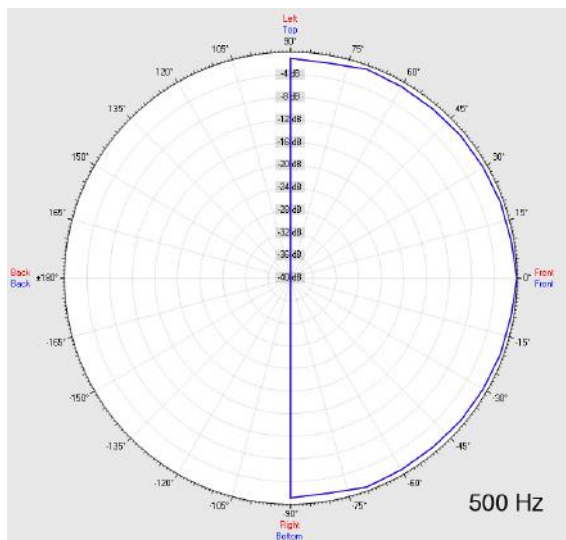


Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	180°	180°	161°	61°
EN 54-24	VER	180°	180°	161°	61°
EASE/Ulysses	HOR	180°	180°	180°	55°
EASE/Ulysses	VER	180°	180°	180°	55°

**SW-E21-FT/EN5424**

EN 54-24 Acoustic Panel  
in Metal with 6 Watt Power

## Isobar-Diagramm

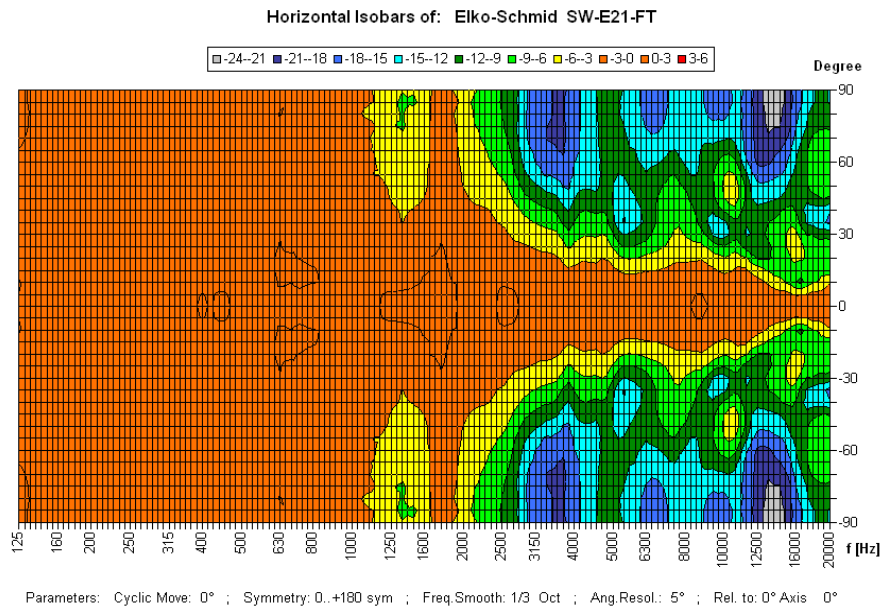


1293

Elko Schmid GmbH & Co. KG  
Glauchauer Str. 30, D-08058 Zwickau

12

DoP: 498058129314-ICS-PN-0013

EN 54-24

Loudspeaker for voice alarm systems for  
fire detection and fire alarm systems for buildings

SW-E21-FT/EN5424

Intended Option:  
Type A