



# WHL-250-AB

On-Wall / Ceiling-Speaker  
in MDF with 2x 10 Watt Power for AB - Systems

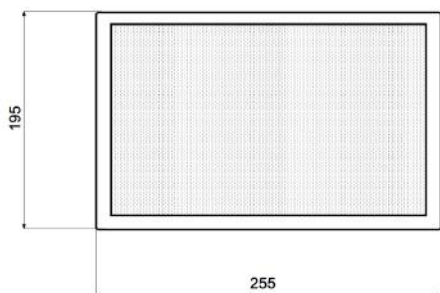

## TECHNICAL DATA

## WHL-250-AB

Loudspeaker: 2x 165 x 70 mm broadband

Power-Consumption: 2x 100V-10-6-3-1,5W

Frequency-Range: 70-20 000 Hz

SPL 1W/1M: 92 dB (double)

SPL 10W/1M: 100 dB (double)

Radiation H/V: 130° / 100° (1 kHz)

Dimension: 255 x 195 x 85mm

Weight: 2,5 kg

Material: MDF / Metal-Grill

Color: white

- Two autonomous loudspeaker/100V-transformer per system
- Easy mounting through Quick-Snap-Rear-Panel & Safety Screws
- Only two drilling-points for the whole loudspeaker
- Enables operation of speaker via two discrete cable-lines
- In case of failure of one line, continuous function of the second line
- Touch-secure 100V-tappings
- Optional screws for ceiling mounting available
- Ceramic clamp & thermal fuse by request
- Optional multiple entry including strain relief available