

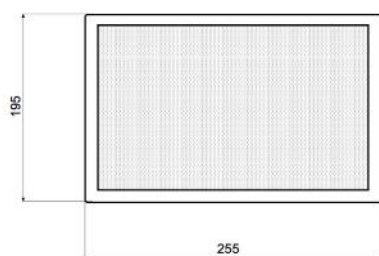


WHL-250-DC

On-Wall / Ceiling-Speaker

in MDF with 2x 6 Watt Power and AB-Dual-Cone-Technique

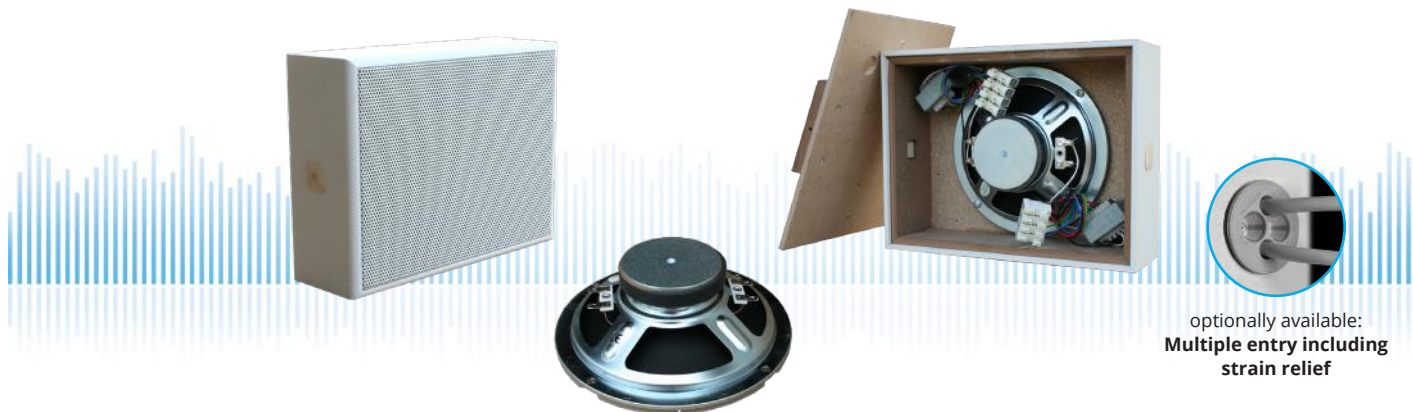

TECHNICAL DATA

WHL-250-DC

Loudspeaker:	6,5" with Dual Voice Coil
Power-Consumption:	2x 100V-6-3-1,5W
Frequency-Range:	70-18 000 Hz
SPL 1W/1M:	95 dB (double)
SPL 6W/1M:	103 dB (double)
Radiation H/V:	90° / 180° (1 kHz)
Dimension:	255 x 195 x 85 mm
Weight:	2,2 kg
Material:	MDF / Metal-Grill
Color:	white

- Two autonomous loudspeaker/100V-transformer per system
 - Enable operation of speaker via two discrete cable-lines
 - In case of breakdown of one line, continuous function of the second
 - In case of overheating of one coil, continuous function of the second
 - No bisection of the membrane surface
 - Optional screws for ceiling mounting available
 - Ceramic clamp & thermal fuse by request
 - Optional multiple entry including strain relief available
- Always check full functionality of the line monitoring before using our dual voice coil products.