
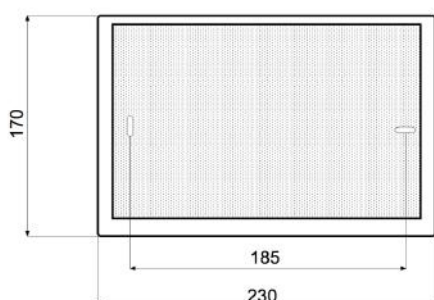


WLA-230-DC

On-Wall / Ceiling-Speaker

in ABS with 2x 6 Watt Power and AB-Dual-Cone-Technique

**TECHNISCHE DATEN****WLA-230-DC**

Loudspeaker:	5" Breitband with Dual Voice Coil
Power-Consumption:	2x 100V-6-3-1,5W
Frequency-Range:	80-16 000 Hz
SPL 1W/1M:	95 dB (double)
SPL 6W/1M:	103 dB (double)
Radiation H/V:	85° / 108° (1 kHz)
Dimension:	230 x 170 x 80mm
Weight:	1,4 kg
Material:	ABS / Metal-Grill
Color:	white

- Two autonomous loudspeaker/100V-transformer per system
- Enable operation of speaker via two discrete cable-lines
- In case of breakdown of one line, continuous function of the second
- In case of overheating of one coil, continuous function of the second
- No bisection of the membrane surface
- Custom colors & wetroom-version with ALU-grill obtainable
- Ceramic clamp & thermal fuse by request
- Optional multiple entry including strain relief available

- Always check full functionality of the line monitoring before using our dual voice coil products.