


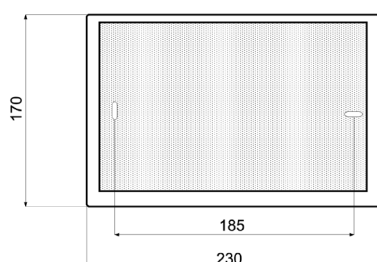
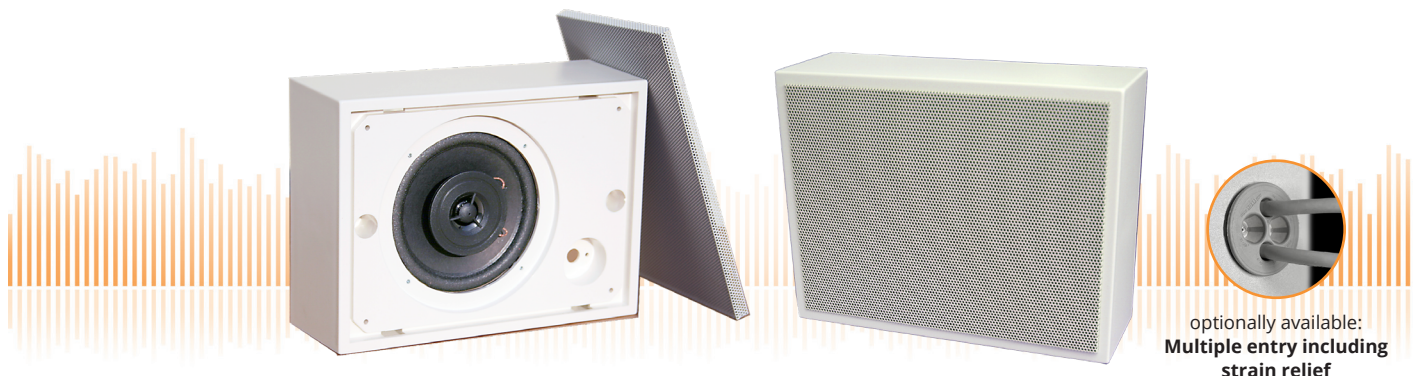
WALL SPEAKER

WLA-230-II-20W

Wall / On-Ceiling - Speaker
in ABS with 20 Watt Power and 2-Way - Technology



Elektroakustische Komponenten

**TECHNICAL DATA****WLA-230-II-20W**

Loudspeaker:	20W/120 mm - 2-Way-System
Power-Consumption:	100V-20-10-6-3-1,5W
Frequency-Range:	80-20 000 Hz
SPL 1W/1M:	92 dB (96 dB/1,7 kHz)
SPL 20W/1M:	100 dB (107 dB/1,7 kHz)
Radiation H/V:	122° / 180° (1 kHz)
Dimension:	230 x 170 x 80 mm
Weight:	ca. 1,8 kg
Material:	ABS
Color:	white

- Easy mounting through Quick-Snap-Rear-Panel
- Only two drilling-points for the whole loudspeaker
- Flame retardant ABS material
- Five touch-secure 100V-tappings
- Custom colors optional
- Wetroom-version with ALU-grill and impregnation obtainable
- Ceramic clamp & thermal fuse by requ
- Optional multiple entry including strain relief available