
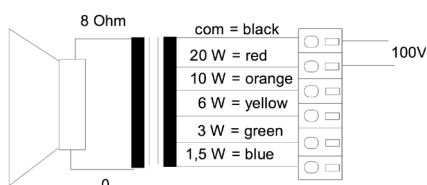



WLA-230G-II-20W/EN5424

EN 54-24 Wall / On-Ceiling - Speaker
in ABS with 20 Watt Power and 2-Way - Technology

EN
54-24

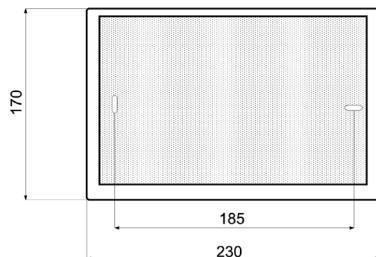





TECHNICAL DATA	WLA-230G-II-20W/EN5424
Loudspeaker:	20W/120mm - 2-Way-System
Power-Consumption:	100V-20-10-6-3-1,5W
Frequency-Range:	80-20 000 Hz
EN-Sensitivity 1W/4M:	73 dB
SPL max 20W/4M:	88 dB
SPL 1W/1M max. EASE/Ulysses:	96 dB (1,7 kHz)
SPL 20W/1M max. EASE/Ulysses:	109 dB (1,7 kHz)
Radiation H (0,5/1/2/4KHz):	180°/122°/137°/56°
Radiation V (0,5/1/2/4KHz):	180°/180°/108°/52°
Dimension:	230 x 170 x 80 mm
Weight:	ca. 1,8 kg
Material:	ABS / 5VB
Color:	white
Certificate-Nr.:	1293-CPR-0514
Order-Nr.:	WLA-230G-II-20W/EN5424

- Easy mounting through Quick-Snap-Rear-Panel
- Only two drilling-points for the whole loudspeaker
- 100V/20-10-6-3-1,5W tapings
- Flame retardent material acc. to EN 60695-11-20, 5VB
- Custom colors optional
- Wetroom-version with ALU-grill and impregnation obtainable
- Five touch-secure 100V-tapings
- Ceramic clamp & thermal fuse by request
- Optional multiple entry including strain relief available

WLA-230G-II-20W/EN5424

EN 54-24 Wall / On-Ceiling - Speaker
in ABS with 20 Watt Power and 2-Way - Technology

Radiation

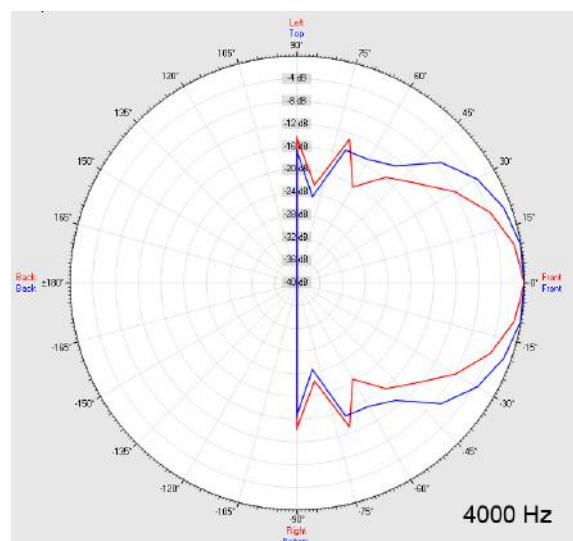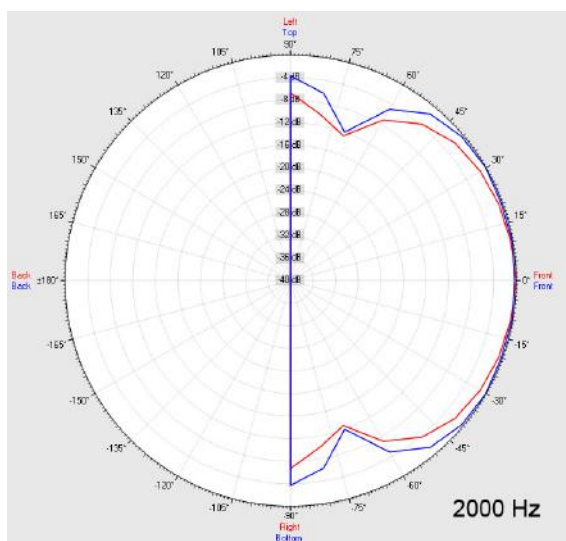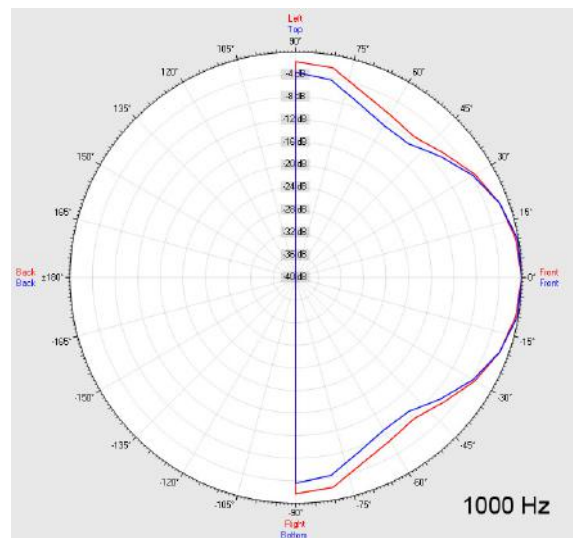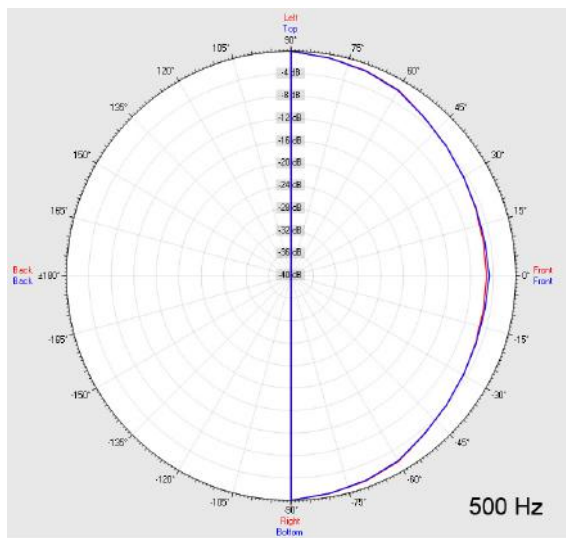

Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	180°	122°	137°	56°
EN 54-24	VER	180°	180°	108°	52°
EASE/Ulysses	HOR	180°	80°	115°	30°
EASE/Ulysses	VER	180°	80°	115°	30°



WLA-230G-II-20W/EN5424

EN 54-24 Wall / On-Ceiling - Speaker
in ABS with 20 Watt Power and 2-Way - Technology



Elektroakustische Komponenten

Isobar-Diagramm

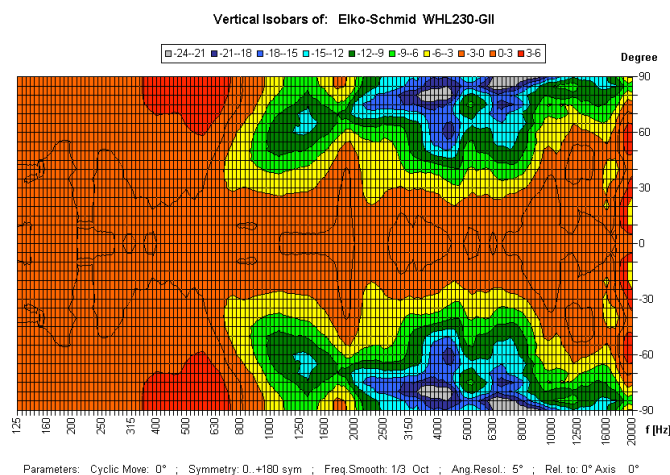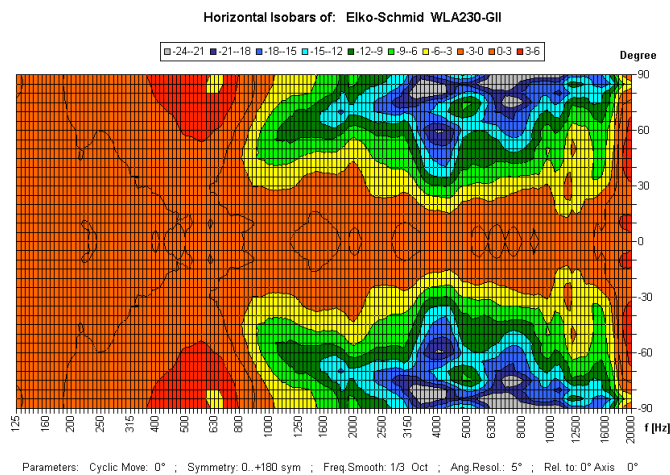

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

15

DoP: 498058129314-OWS-PN-0014

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

WLA-230G-II-20W/EN5424

Intended Option:
Type A