

ALU-SOUND-PROJECTOR LA-200WT-DC-10W & 30W FOR A/B-SYSTEMS

L
A
M
P
R
O
D
Y
N

200
WT

DC

10W


30W

F
O
R

A / B

S
Y
S
T
E
M

L
I
N
E
S

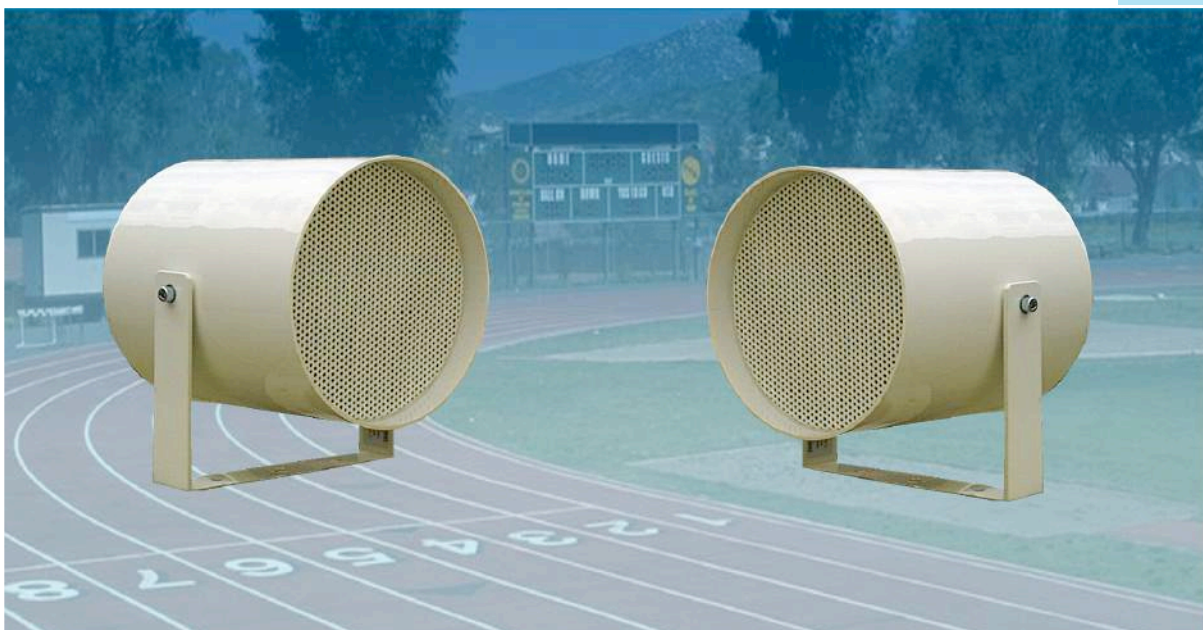

- **TWO AUTONOMOUS** VOICE-COILS PER SYSTEM
- **TWO AUTONOMOUS** 100-VOLT-TRANSFORMER PER SYSTEM
- ENABLE OPERATION OF SPEAKER VIA TWO DISCRETE CABLE-LINES
- IN CASE OF FAILURE OF ONE LINE, CONTINOUS FUNCTION OF THE SECOND-LINE
- **50-HZ-STABLE** 100-V-TRANSFORMER
- EXCLUSIVE USE OF **STAINLESS-STEEL/ALUMINIUM**-COMPONENTS
- ADDITIONAL RAIN-PROTECTION THROUGH CUSTOM-RAIN-ROOF
- CUSTOM-COLOUR & **CHROME-PLATED** VERSIONS AVAILABLE
- CUSTOM-SIZE & **PENDULAR-VERSIONS** OBTAINABLE

TECHNICAL DATA:	LA-200WT-DC/10W	LA-200WT-DC/30W
Loudspeaker:	2 x 6,5"-30W-Fullrange	2 x 6,5"-30W-Fullrange
Power-Consumption:	2 x 10-5-2,5W	2 x 30-20-10W
Frequency-Range:	80-18 000 Hz	80-18 000 Hz
SPL 1W/1m:	95 dB	95 dB
SPL nW/1m:	105 dB	109,5 dB
Dimensions (d x depth) :	219 mm x 250 mm	219 mm x 250 mm
Weight:	3,4 Kg	3,5 Kg
Colour:	RAL 9010	RAL 9010

