

# Weatherproof 30-WATT-2-WAY-SOUND-PROJECTOR LA-200 WT

L  
A  
M  
P  
R  
O  
D  
Y  
N

200  
WT


2 Way

30  
Watt

30  
Watt  
E-Sonic  
808

UPGRADE  
of  
ALTEC  
408/409

W  
E  
A  
T  
H  
E  
R  
P  
R  
O  
O  
F

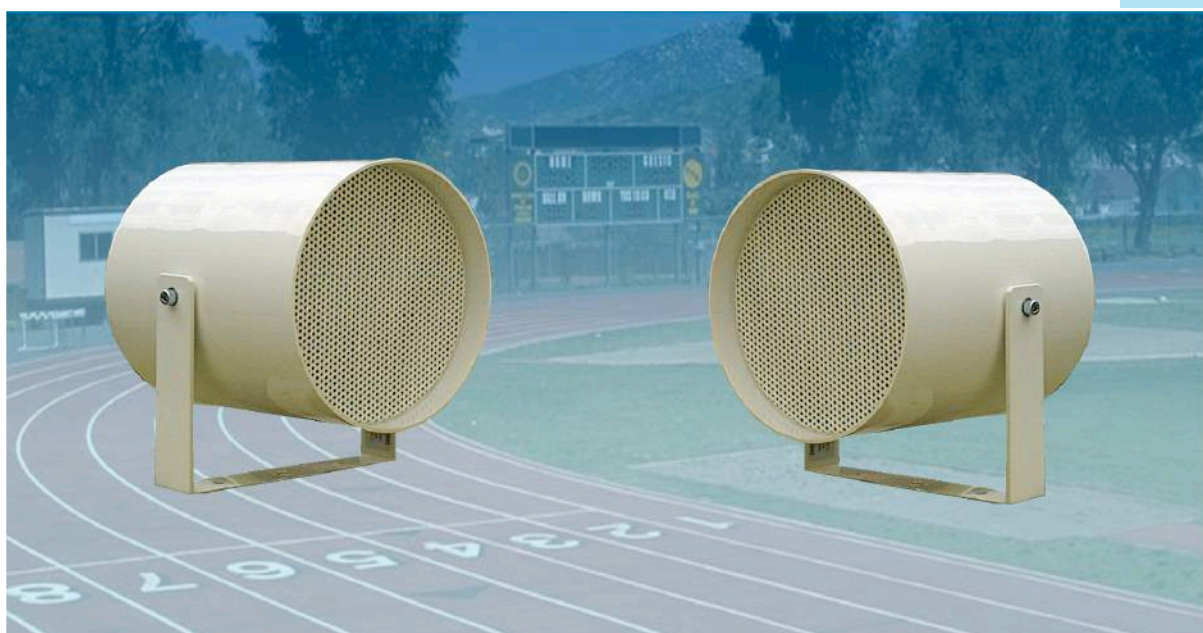

- FIRE-RESISTANT/PROTECTED
- AGELESS FORM-STABLE
- EXCLUSIVE USE OF **STAINLESS-STEEL/ALUMINIUM**-COMPONENTS
- ADDITIONAL RAIN-PROTECTION THROUGH CUSTOM-RAIN-ROOF
- **50-HZ-STABLE** 100-V-TRANSFORMER
- **OUTSTANDING** LOUDSPEAKER-QUALITY (DLS-265F/ALTEC-409)
- POWER-SAVING THROUGH HIGH **SOUND-PREASURE-LEVEL**
- CUSTOM-COLOUR & **CHROME-PLATED** VERSIONS AVAILABLE
- CUSTOM-SIZE & **PENDULAR-VERSIONS** OBTAINABLE

## TECHNICAL DATA:

### LA-200WT-30W

### LA-200WT/E-SONIC-808 (UPGRADE OF ALTEC-408)

Loudspeaker:	30W Elko-2-Way-System	30/60W-E-SONIC-808
Power-Consumption:	100V-30-15-7,5W	100V-30-15-7,5W
FQ-Range:	50-20 000 Hz	60-20 000 Hz
SPL 1W/1m:	98 dB	100 dB
SPL 30W/1m:	113 dB	115 dB
SPL 1W/1m <b>max:</b>	99 dB (4,7 kHz)	102,5 dB (4 kHz)
SPL 30/50W/1m <b>max:</b>	114 dB (4,7 kHz-30W)	117,5 dB (4 kHz)
Radiation:	180 ° (1,6 kHz)	180° (1 kHz)
Dimensions (dia x depth) :	219 mm x 250 mm	219 mm x 250 mm
Weight:	2,9 Kg	3,5 Kg
Colour:	RAL 9010	RAL 9010

